Tethys

TYS-BH-B-EMD-IP



DESCRIPTION

The Tethys LED bulkhead exit sign utilises an IP65-rated polycarbonate base and Fresnel lens housing 16 high-output white LEDs and a constant current-maintained drive circuit. The luminaire provides 150 lumens, and the lens generates a wide intensity distribution ideal for providing good illuminance on the escape route. The polycarbonate lens can be fitted with 100mm high, self-adhesive safety signs. A deep (150mm) opal diffuser is also available to provide double-sided signage if required. Tethys is available with DALI and self-test.

IP65 Waterproof

SPECIFICATIONS

Dimensions	L350mm x H120mm x W65mm
Input Voltage	AC 220-240V
Lumen Output	150lm
LED Efficacy	50lm/W
Color Rendering Index	>70
Dimming	Non-Dimmable | Switched | Triac | 0 to 10V | DALI 2 | Bluetooth
Control Gear Location	Integral

DIMENSIONS

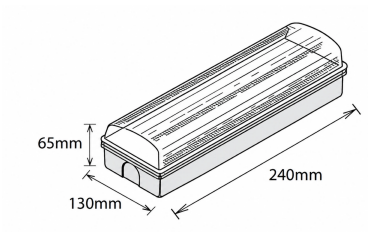

POLAR CURVE

LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™
Citation ISO Certification ISO 9001: 2015 ISO 14001: 2015 REGISTERED
Certificate No:447672024

Emergency Gear Location	Integral
Housing Material	Polycarbonate
IP Rating	IP65
DALI Available	Yes
Dimension 1	L350mm x H120mm x W65mm
Mounting Type	Surface Mounted
Battery Discharge Current	1 x 3.2V 1.8Ah LiFePO4
Ambient Temperature (Ta)	0°C-25°C
LED Lifetime	50,000h
Warranty	5 years

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024