Atlas

ATL-BH-HB-W-EMD



DESCRIPTION

The Atlas bulkhead with hanging blade offers over 150 Lumens LED output with a distribution to ensure maximum spacing between luminaires. Mimas luminaires are available with mains only or maintained emergency operation (non-Maintained operation achieved by excluding a switched live supply). All emergency versions provide a 3-hour duration from integral high-temperature Nickel Cadmium (NiCd) batteries. Maintained versions can be used for standard switched mains lighting but will automatically provide emergency lighting in the event of a complete loss of normal mains supply.

IP65 Waterproof

SPECIFICATIONS

Dimensions	L240mm x H130mm x W50mm (Bulkhead) L240mm x H183mm x W63mm (Hanging Blade)
Input Voltage	AC 220-240V
Lumen Output	150lm
LED Efficacy	50lm/W
Color Rendering Index	>70
Dimming	Non-Dimmable | Switched | Triac | 0 to 10V | DALI 2 | Bluetooth
Control Gear Location	Integral

DIMENSIONS

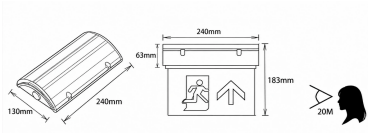

POLAR CURVE

LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024

Emergency Gear Location	Integral
Housing Material	Polycarbonate
IP Rating	IP65
DALI Available	Yes
Dimension 1	L240mm x H130mm x W50mm (Bulkhead) L240mm x H183mm x W63mm (Hanging Blade)
Mounting Type	Surface Mounted
Battery Discharge Current	1 x 3.6V 1.5Ah NiCd
Ambient Temperature (Ta)	0°C-25°C
LED Lifetime	50,000h
Warranty	5 years

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™
Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024