Europa

EUR-TF-B-EMD



DESCRIPTION

Simple and effective emergency lighting from attractive high-intensity LED projectors. More suitable for areas with aesthetic concerns than conventional twin-projector floodlights, the Europa is ideal for a wide range of applications requiring open-area and escape lighting. The 2-watt projector heads provide over 110 lumens per head and a clever adjustable narrow beam or a general wide beam. NB Full photometry is available upon request. Supplied with high-quality white LEDs and Nickel Metal Hydride (NiMH) batteries.

IP20

SPECIFICATIONS

Dimensions	186mm (L) x 108mm (H) x 55mm (D)
Input Voltage	AC 220-240V
Lumen Output	2 x 110lm
LED Efficacy	55lm/W
Color Rendering Index	>70
Dimming	Non-Dimmable | Switched | Triac | 0 to 10V | DALI 2 | Bluetooth
Control Gear Location	Integral
Emergency Gear Location	Integral

DIMENSIONS

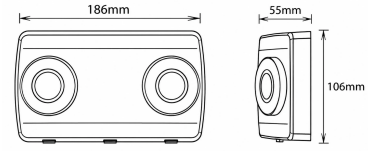

POLAR CURVE

LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™
Citation ISO Certification ISO 9001: 2015 ISO 14001: 2015 REGISTERED
Certificate No:447672024

Housing Material	Polycarbonate
IP Rating	IP20
DALI Available	Yes
Dimension 1	186mm (L) x 108mm (H) x 55mm (D)
Mounting Type	Surface Mounted
Battery Discharge Current	1 x 3.6V 1.5Ah NiCd
Ambient Temperature (Ta)	0°C-25°C
LED Lifetime	50,000h
Warranty	5 years

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024