Callisto

CTO-TF-B-EMD




DESCRIPTION

The Callisto projector luminaires offer simple and effective emergency lighting from high-efficiency LED projectors. These units feature a novel lens system offering fine optical control, resulting in high-intensity beam patterns to ensure effective area illumination. The 6-watt projector heads provide excellent performance, and full photometry (LDT files) can be supplied upon request. The Callisto units are supplied with high-quality 3.6-volt 4Ah NiCd batteries. This luminaire can be specified with integral DALI/Self-Test gear providing automatic Self-Test in accordance with BSEN62034 or fully interoperable DALI operation when connected to a DALI control system.

IP20

DIMENSIONS

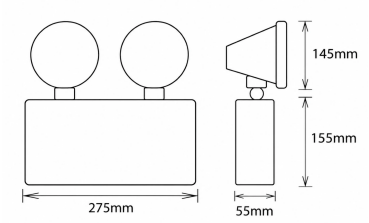

POLAR CURVE

LUMINAIRE FINISHES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024

SPECIFICATIONS

Dimensions	275mm (L) x 55mm (W) x 300mm (H)
Input Voltage	AC 220-240V
Lumen Output	2 x 380lm
LED Efficacy	126lm/W
Color Rendering Index	>70
Dimming	Non-Dimmable | Switched | Triac | 0 to 10V | DALI 2 | Bluetooth
Control Gear Location	Integral
Emergency Gear Location	Integral
Housing Material	Polycarbonate
IP Rating	IP20
DALI Available	Yes
Dimension 1	275mm (L) x 55mm (W) x 300mm (H)
Mounting Type	Surface Mounted
Battery Discharge Current	3.6V 4Ah NiCd
Ambient Temperature (Ta)	0°C-25°C
LED Lifetime	50,000h
Warranty	5 years

Body W / B / S / R - Custom RAL

NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™
Citation ISO Certification Integrated Management System ISO 9001: 2015 ISO 14001: 2015 REGISTERED
Certificate No:447672024