# Kalyke

KAL-BH-EXIT-R-EMD



IP65
Waterproof

## DESCRIPTION

The Kalyke range offers an attractive flush-mounting luminaire that accommodates a hanging-blade exit legend. The luminaires utilise a polycarbonate body and lens and are available with white LED light sources. Ease of installation is assured, due to the adjustable arms that swing out and clamp down onto the supporting surface. The exit panel is moulded with a wedge shape to improve the luminance distribution over the legends. Kalyke luminaires are available with DALI and self-test.

## SPECIFICATIONS

| | |
|---|---|
| Dimensions | 420mm (L) x 165mm (W) x 160mm (H) |
| Input Voltage | AC 220-240V |
| Lumen Output | 160lm |
| LED Efficacy | 53lm/W |
| Color Rendering Index | >70 |
| Dimming | Non-Dimmable \| Switched \| Triac \| 0 to 10V \| DALI 2 \| Bluetooth |
| Control Gear Location | Integral |

## DIMENSIONS

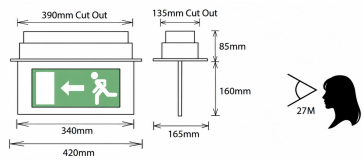


## POLAR CURVE

## LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

## NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™
Citation ISO Certification
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024

| | |
|---|---|
| Emergency Gear Location | Integral |
| Housing Material | Polycarbonate |
| IP Rating | IP65 (Bulkhead) IP21 (Hanging Blade) |
| DALI Available | Yes |
| Dimension 1 | 420mm (L) x 165mm (W) x 160mm (H) |
| Cut Out | 390-135mm Cut Out |
| Mounting Type | Recessed |
| Battery Discharge Current | 1 x 3.2V 1.8Ah LiFePO4 |
| Ambient Temperature (Ta) | 0°C-25°C |
| LED Lifetime | 50,000h |
| Warranty | 5 years |

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™
Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024