Elara

ELA-BH-W-EMD-IP



DESCRIPTION

The Elara range offers an attractive flush-mounting luminaire with an optional lens that accommodates a hanging-blade exit legend. The luminaires utilise a polycarbonate body and lens and are available with white LED light sources. Ease of installation is assured, due to the adjustable arms that swing out and clamp down onto the supporting surface. The optional exit panel is moulded with a wedge shape to improve the luminance distribution over the legends. The plain lens seals the recessed enclosure to IP65. Elara luminaires are available with DALI and self-test.

IP65 Waterproof

SPECIFICATIONS

Dimensions	420mm (L) x 165mm (W) x 85mm(D)
Input Voltage	AC 220-240V
Lumen Output	160lm
LED Efficacy	53lm/W
Color Rendering Index	>70
Dimming	Non-Dimmable | Switched | Triac | 0 to 10V | DALI 2 | Bluetooth
Control Gear Location	Integral
Emergency Gear Location	Integral

DIMENSIONS

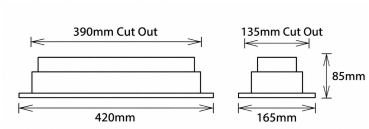

POLAR CURVE

LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024

Housing Material	Polycarbonate
IP Rating	IP65
DALI Available	Yes
Dimension 1	420mm (L) x 165mm (W) x 85mm(D)
Cut Out	390-135mm Cut Out
Mounting Type	Recessed
Battery Discharge Current	1 x 3.2V 1.8Ah LiFePO4
Ambient Temperature (Ta)	0°C-25°C
LED Lifetime	50,000h
Warranty	5 years

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024