Cyllene

CYL-EXIT-W-EM-IP



DESCRIPTION

The Cyllene exit sign range has been developed to provide a robust but attractive solution for exterior applications requiring effective safety signage. Cyllene signs offer an excellent viewing distance of 30 metres via easy-to-change legends, a robust polycarbonate housing rated IP65/IK08.

IP65
Waterproof

SPECIFICATIONS

Dimensions	329mm (L) x 66mm (D) x 226mm (H)
Input Voltage	AC 220-240V
Lumen Output	150lm
LED Efficacy	42.8lm/W
Color Rendering Index	>70
Dimming	Non-Dimmable | Switched | Triac | 0 to 10V | DALI 2 | Bluetooth
Control Gear Location	Integral

DIMENSIONS

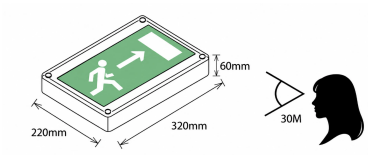

POLAR CURVE

LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024

Emergency Gear Location	Integral
Housing Material	Polycarbonate
IP Rating	IP65
IK Rating	IK08
DALI Available	Yes
Dimension 1	329mm (L) x 66mm (D) x 226mm (H)
Mounting Type	Surface Mounted
Battery Discharge Current	3.2V 1.5Ah LiFePO4
Ambient Temperature (Ta)	0°C-25°C
LED Lifetime	50,000h
Warranty	5 years

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024