Dione

DIO-EXIT-W-EMD



DESCRIPTION

The Dione LED Emergency Lighting Exit Sign provides an excellent viewing distance of 30 metres. Although still a ‘box’ design, it offers much sleeker aesthetics than conventional emergency lighting exit sign boxes. Dione Exit Sign luminaires feature attractive Polycarbonate enclosures with a sloping front opal panel and screen-printed safety sign legends. The integral rechargeable batteries and charger/driver PCB are mounted on the back surface, and the advanced wide-angle white LEDs provide even and effective illuminance across the legend. Dione is available with DALI and Self-Test.

IP42

SPECIFICATIONS

Dimensions	333mm (L) x 75mm (D) x 160mm (H)
Input Voltage	AC 220-240V
Lumen Output	120lm
LED Efficacy	40lm/W
Color Rendering Index	>70
Dimming	Non-Dimmable | Switched | Triac | 0 to 10V | DALI 2 | Bluetooth
Control Gear Location	Integral
Emergency Gear Location	Integral

DIMENSIONS

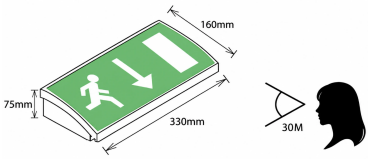

POLAR CURVE

LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™
Citation ISO Certification ISO 9001: 2015 ISO 14001: 2015 REGISTERED
Certificate No:447672024

Housing Material	Polycarbonate
IP Rating	IP42
DALI Available	Yes
Dimension 1	333mm (L) x 75mm (D) x 160mm (H)
Mounting Type	Surface Mounted
Battery Discharge Current	3.6V 1.5Ah . NiCd
Ambient Temperature (Ta)	0°C-25°C
LED Lifetime	50,000h
Warranty	5 years

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024