Titan

TTN-TF-W-EMD-IP



IP65
Waterproof

DESCRIPTION

Titan projector luminaires offer simple and effective emergency lighting from high-efficiency LED projectors and are suitable for exterior locations. Titan units feature a novel lens system offering fine optical control, resulting in high-intensity beam patterns to ensure effective area illumination. The Titan units are supplied with high-quality 7.2-volt 4.5 Ah NiCd batteries. Titan luminaires can be specified with integral DALI/Self-Test gear, providing automatic Self-Test in accordance with BS EN 62034, or fully interoperable DALI operation when connected to a DALI control system.

SPECIFICATIONS

Dimensions	280mm (L) x 140mm (D) x 310mm (H)
Input Voltage	AC 220-240V
Lumen Output	2 x 520lm
Color Rendering Index	>70
Dimming	Non-Dimmable | Switched | Triac | 0 to 10V | DALI 2 | Bluetooth
Control Gear Location	Integral

DIMENSIONS

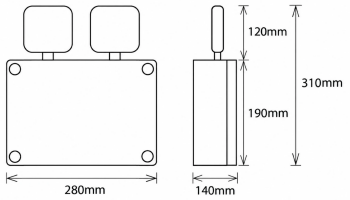

POLAR CURVE

LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™
Citation ISO Certification
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024

Emergency Gear Location	Integral
Housing Material	Aluminium Heads + Polycarbonate
IP Rating	IP65
DALI Available	Yes
Dimension 1	280mm (L) x 140mm (D) x 310mm (H)
Mounting Type	Surface Mounted
Battery Discharge Current	7.2V 4.5Ah NiCd
Ambient Temperature (Ta)	0°C-25°C
LED Lifetime	50,000h
Warranty	5 years

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024