Carpo

CARP-235-EXIT-B-SUS-EMD



DESCRIPTION

The Carpo LED Exit Sign is compact and features a decorative legend with high luminance performance. LED self-contained luminaire with manual test and auto test optional. Replaceable legends. Single and double face universal. LiFePO4 battery. Flexible mounting options.

IP20

SPECIFICATIONS

Dimensions	235mm (L) x 38mm (W) x 163.3mm (H)
Input Voltage	AC 220-240V
Color Rendering Index	>80
Dimming	Non-Dimmable | Switched | Triac | 0 to 10V | DALI 2 | Bluetooth
Control Gear Location	Integral

DIMENSIONS

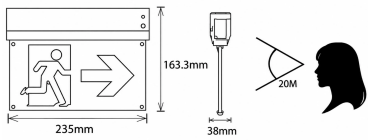

POLAR CURVE

LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™
Citation ISO Certification ISO 9001: 2015 ISO 14001: 2015 REGISTERED
Certificate No:447672024

Emergency Gear Location	Integral
Housing Material	Polycarbonate
IP Rating	IP20
DALI Available	Yes
Dimension 1	235mm (L) x 38mm (W) x 163.3mm (H)
Mounting Type	Surface Mounted | Suspended | Recessed
LED Voltage Limit	3.2V
Battery Discharge Current	LiFePO4 6.4V600mAh
Power Rating (Charging)	2.5W
Power Rating (Standing)	<0.5W
Charge Current	225mA±15%
Battery Cut Off	Charge: 7.3V; Discharge: 5.8V
Ambient Temperature (Ta)	0℃~45℃
Case Temperature (Tc)	-40℃-120℃
LED Lifetime	50,000h
Warranty	5 years

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™
Citation ISO Certification Integrated Management System ISO 9001: 2015 ISO 14001: 2015 REGISTERED
Certificate No:447672024