Phoebe

PHO-BH-EXIT-B-EMD-IP



DESCRIPTION

The Phoebe LED emergency bulkhead is controlled by smart IC with self-test function. It has two different outputs which are adjustable. Optional interchangeable legends. IP65 Rated. Efficient and reliable LED light source.

IP65
Waterproof

SPECIFICATIONS

Dimensions	340mm (L) x 108mm (W) x 194mm (H)
Input Voltage	AC 220-240V
Color Rendering Index	>80
Dimming	Non-Dimmable | Switched | Triac | 0 to 10V | DALI 2 | Bluetooth
Control Gear Location	Integral
Emergency Gear Location	Integral
Housing Material	Aluminium and Polycarbonate

DIMENSIONS

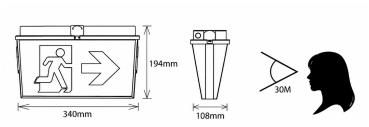

POLAR CURVE

LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™
Citation ISO Certification ISO 9001: 2015 ISO 14001: 2015 REGISTERED
Certificate No:447672024

IP Rating	IP65
DALI Available	Yes
Dimension 1	340mm (L) x 108mm (W) x 194mm (H)
Mounting Type	Surface Mounted
Battery Discharge Current	LiFePO4 6.4V 1500mAh
Ambient Temperature (Ta)	0℃~45℃
LED Lifetime	50,000h
Warranty	5 years

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024