Rhea

RHE-ADJ-EXIT-B-SUS-EMD



IP20


DESCRIPTION

High luminance performance rotatable 180° Emergency Exit Sign with fire-retardant ABS housing. Multiple mounting methods to match your different installation requirements. Single and double face universal, replaceable legends.

SPECIFICATIONS

Dimensions	328mm (L) x 43mm (W) x 230mm (H)
Input Voltage	AC 220-240V
Color Rendering Index	>80
Dimming	Non-Dimmable | Switched | Triac | 0 to 10V | DALI 2 | Bluetooth
Control Gear Location	Integral
Emergency Gear Location	Integral

DIMENSIONS

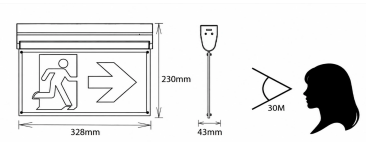

POLAR CURVE

LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™
Citation ISO Certification ISO 9001: 2015 ISO 14001: 2015 REGISTERED
Certificate No:447672024

Housing Material	Polycarbonate
IP Rating	IP20
DALI Available	Yes
Dimension 1	328mm (L) x 43mm (W) x 230mm (H)
Mounting Type	Surface Mounted | Suspended | Recessed
LED Voltage Limit	3.0V
Battery Discharge Current	LiFePO4 3.2V 1200mAh
Power Rating (Charging)	0.6W
Power Rating (Standing)	<0.5W
Charge Current	130mA±15%
Battery Cut Off	Charge: 3.6V; Discharge: 3.0V
Ambient Temperature (Ta)	0℃~45℃
Case Temperature (Tc)	-40℃-120℃
LED Lifetime	50,000h
Warranty	5 years

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™
Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024