Tarvos

TAR-EXIT-BOX-B-SUS-EMD



DESCRIPTION

Tarvos LED Exit Box features a compact, decorative design and high luminance performance. It is suitable for wall mounting and recessed mounting. Replaceable legends. PC housing with IP40 and IK07 rating. Utilises a light guide plate to distribute light evenly. LiFePO4 battery guarantees a long lifetime.

IP40

SPECIFICATIONS

Dimensions	330mm (L) x 45mm (W) x 190mm (H)
Input Voltage	AC 220-240V
Color Rendering Index	>80
Dimming	Non-Dimmable | Switched | Triac | 0 to 10V | DALI 2 | Bluetooth
Control Gear Location	Integral
Emergency Gear Location	Integral
Housing Material	Polycarbonate

DIMENSIONS

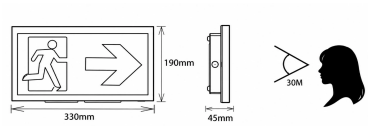

POLAR CURVE

LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™
Citation ISO Certification ISO 9001: 2015 ISO 14001: 2015 REGISTERED
Certificate No:447672024

IP Rating	IP40
IK Rating	IK07
DALI Available	Yes
Dimension 1	330mm (L) x 45mm (W) x 190mm (H)
Mounting Type	Surface Mounted | Suspended | Recessed
LED Voltage Limit	3.2V
Battery Discharge Current	LiFePO4 3.2V 1500mAh
Power Rating (Charging)	1.0W
Power Rating (Standing)	<0.5W
Charge Current	200mA±15%
Battery Cut Off	Charge: 3.6V; Discharge: 3.0V
Ambient Temperature (Ta)	0℃~45℃
Case Temperature (Tc)	-40℃-120℃
LED Lifetime	50,000h
Warranty	5 years

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™
Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024