# Cressida

CRE-140-NM-EM-B-EMD-IP



## DESCRIPTION


The Cressida waterproof emergency downlight is controlled by smart IC with a self-test function. Interchangeable oval lens for escape route application or round lens for open areas. Compact high-performance and IP65 rated.

IP65 Waterproof

## SPECIFICATIONS

| | |
|---|---|
| Dimensions | ⌀ 175mm (Dia) x 78mm (H) |
| Input Voltage | AC 220-240V |
| Lumen Output | 240lm \| 450lm |
| LED Efficacy | 73lm/W |
| Color Rendering Index | >70 |
| Dimming | Non-Dimmable \| Switched \| Triac \| 0 to 10V \| DALI 2 \| Bluetooth |

## DIMENSIONS

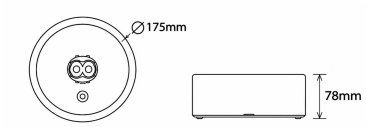


## POLAR CURVE

## LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

## NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™
Citation ISO Certification ISO 9001: 2015 ISO 14001: 2015 REGISTERED
Certificate No:447672024

| | |
|---|---|
| Control Gear Location | Integral |
| Housing Material | Polycarbonate |
| IP Rating | IP65 |
| DALI Available | Yes |
| Dimension 1 | □ 175mm (Dia) x 78mm (H) |
| Mounting Type | Surface Mounted |
| Battery Discharge Current | LiFePO46.4V 1500mAh/ |
| Power Rating (Standing) | <0.5W |
| Charge Current | 175mA±15% |
| Ambient Temperature (Ta) | 0℃-45℃ |
| Case Temperature (Tc) | -40℃-120℃ |
| LED Lifetime | 50,000h |
| Warranty | 5 years |

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™
Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024