Kivu

KIV-110-B-BR-L-3K-2-ND



DESCRIPTION

The KIVU is a high performance recessed LED Downlight featuring a deep reflector design for excellent glare control with a typical UGR<19 for most sizes. Offering high luminous efficiency, multiple beam angles (24°, 36°, 60°), and interchangeable reflectors and trims, it provides flexible lighting solutions without compromising colour quality or uniformity. KIVU combines reliable performance, easy installation and a refined aesthetic.

UK CA CE RoHS IP54 Waterproof DALI 2

SPECIFICATIONS

Dimensions	⌀ 110mm x H 54mm
Input Voltage	AC 220-240V
Lumen Output	1100lm | 1430lm
LED Efficacy	110lm/W
Color Rendering Index	>80
Dimming	Non-Dimmable | Switched | Triac | 0 to 10V | DALI 2 | Bluetooth
Control Gear Location	Remote
Emergency Gear Location	Remote
Housing Material	Aluminium

DIMENSIONS

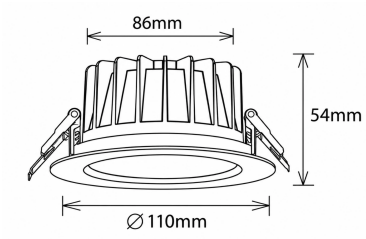

POLAR CURVE

LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification ISO 9001: 2015 ISO 14001: 2015 REGISTERED

Certificate No:447672024

IP Rating	IP54
IK Rating	IK06
DALI Available	Yes
Dimension 1	□ 110mm x H 54mm
Cut Out	Ø90-95mm
Mounting Type	Recessed
LED Lifetime	50,000h
Warranty	5 years

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024