Volta

VOL-115-S-SR-H-3K-1-ND




DESCRIPTION

The VOLTA is an LED downlight range available in six sizes, combining a shallow reflector design with an efficacy of 105lm/W. A wide 100° beam angle provides broad illumination for general lighting applications. Various finishes and reflector options are available upon request to complement different interior schemes, while DALI 2, Triac and other dimming options provide adaptable lighting control. The range is rated IP54.

SPECIFICATIONS

Dimensions	⌀ 115mm x H52mm
Input Voltage	AC 220-240V
Lumen Output	1050lm | 1365lm | 1050-1365lm
LED Efficacy	105lm/W
Color Rendering Index	>80
Dimming	Non-Dimmable | Switched | Triac | 0 to 10V | DALI 2 | Bluetooth
Control Gear Location	Remote
Emergency Gear Location	Remote

DIMENSIONS

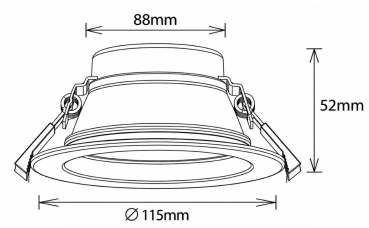

POLAR CURVE

LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

Certificate No:447672024

Housing Material	Aluminium
IP Rating	IP54
DALI Available	Yes
Dimension 1	□ 115mm x H52mm
Cut Out	Ø90-95mm
Mounting Type	Recessed
LED Lifetime	50,000h
Warranty	5 years

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024