Nor

NOR-100-106-B-BR-H-3K-2-TR



DESCRIPTION

The NOR is a modular LED downlight offering a choice of nine frames and interchangeable trim covers to suit a variety of interior schemes. Reflector and lens optical modules can be switched directly, allowing the fitting to be adapted to different lighting requirements. Both optical types are available with 36° and 60° beam angles, providing a choice of focused lighting or wider illumination.

SPECIFICATIONS

Dimensions	⌀ 100mm x H106.8mm
Input Voltage	AC 220-240V
Lumen Output	950lm | 1235lm | 1980lm
LED Efficacy	95lm/W (10W + 13W) | 110lm/W (18W)
Color Rendering Index	>80
Dimming	Non-Dimmable | Switched | Triac | 0 to 10V | DALI 2 | Bluetooth

DIMENSIONS

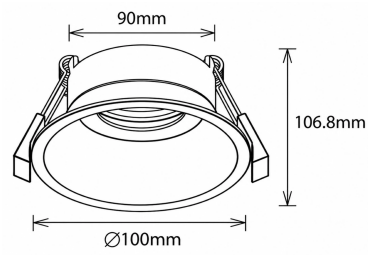

POLAR CURVE

LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

Certificate No:447672024

Control Gear Location	Remote
Emergency Gear Location	Remote
Housing Material	Aluminium
IP Rating	IP20
DALI Available	Yes
Dimension 1	□ 100mm x H106.8mm (10W + 13W), □ 100mm x H126.8mm (18W)
Cut Out	Ø90-95mm
Mounting Type	Recessed
LED Lifetime	50,000h
Warranty	5 years

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024