Victoria

VIC-135-105-B-BR-H-3K-2-ND



DESCRIPTION

The VICTORIA is a modular LED downlight, delivering an efficacy of 110lm/W with an IP54 rating. Easily replaceable reflectors, optical lenses and light sources allow the same module to be used with different accessories, offering design flexibility and straightforward maintenance. Optical lenses are available in 36° and 60° beam angles, with UGR<19 achievable depending on the reflector selected.

SPECIFICATIONS

Dimensions	⌀ 135mm x H105mm
Input Voltage	AC 220-240V
Lumen Output	1100lm | 1430lm | 1980lm
LED Efficacy	110lm/W
Color Rendering Index	>80
Dimming	Non-Dimmable | Switched | Triac | 0 to 10V | DALI 2 | Bluetooth
Control Gear Location	Remote

DIMENSIONS

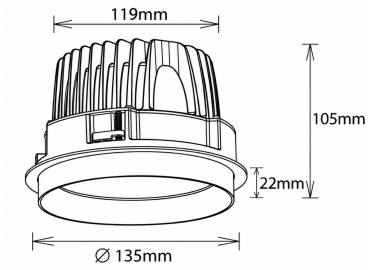

POLAR CURVE

LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

Certificate No:447672024

Emergency Gear Location	Remote
Housing Material	Aluminium
IP Rating	IP54
DALI Available	Yes
Dimension 1	135mm x H105mm
Cut Out	Ø120mm
Mounting Type	Recessed
LED Lifetime	50,000h
Warranty	5 years

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™
Citation ISO Certification Integrated Management System ISO 9001: 2015 ISO 14001: 2015 REGISTERED
Certificate No:447672024