Eyre

EYR-190-S-SR-L-3K-1-ND



DESCRIPTION


The EYRE is a modular LED downlight, available in 15–40W options with an efficacy of 110lm/W. A choice of four reflectors offers design flexibility, while a wide 120° beam angle provides broad illumination for general lighting applications. DALI 2, Triac and other dimming options support adaptable lighting control, and the range is rated IP54.

UK CA CE RoHS IP54 Waterproof DALI 2

SPECIFICATIONS

Dimensions	⌀ 190m x H51mm
Input Voltage	AC 220-240V
Lumen Output	2200lm | 3300lm | 4400lm
LED Efficacy	110lm/W
Color Rendering Index	>80
Dimming	Non-Dimmable | Switched | Triac | 0 to 10V | DALI 2 | Bluetooth
Control Gear Location	Remote

DIMENSIONS

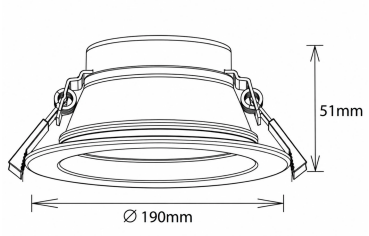

POLAR CURVE

LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification ISO 9001: 2015 ISO 14001: 2015 REGISTERED

Certificate No:447672024

Emergency Gear Location	Remote
Housing Material	Aluminium
IP Rating	IP54
Dimension 1	□ 190m x H51mm
Cut Out	□ 165m x 175mm
Mounting Type	Recessed
LED Lifetime	50,000h
Warranty	5 years

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024