Eyre

EYR-190-S-SR-L-3K-1-TR



DESCRIPTION

The EYRE is a modular LED downlight, available in 15–40W options with an efficacy of 110lm/W. A choice of four reflectors offers design flexibility, while a wide 120° beam angle provides broad illumination for general lighting applications. DALI 2, Triac and other dimming options support adaptable lighting control, and the range is rated IP54.

SPECIFICATIONS

Dimensions	⌀ 190m x H51mm
Input Voltage	AC 220-240V
Lumen Output	2200lm | 3300lm | 4400lm
LED Efficacy	110lm/W
Color Rendering Index	>80
Dimming	Non-Dimmable | Switched | Triac | 0 to 10V | DALI 2 | Bluetooth
Control Gear Location	Remote

DIMENSIONS

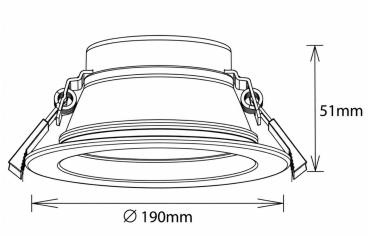

POLAR CURVE

LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

Certificate No:447672024

Emergency Gear Location	Remote
Housing Material	Aluminium
IP Rating	IP54
Dimension 1	□ 190m x H51mm
Cut Out	□ 165m x 175mm
Mounting Type	Recessed
LED Lifetime	50,000h
Warranty	5 years

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024