Pearl

PEA-118-3H-B-H-3K-1-TR-SM-SUS



DESCRIPTION

The PEARL is a versatile multihead LED downlight series for surface-mounted and recessed installation. A wide choice of beam angles (15°, 24°, 38°, 50°, 35×70°), finishes and reflectors allows the range to complement different lighting schemes, while CRI90 provides accurate colour rendering. DALI 2, Triac and other dimming options support adaptable lighting control. The range is rated IP20.

SPECIFICATIONS

Dimensions	118mm (L) x 42mm (W) x 54mm (H)
Input Voltage	AC 220-240V
Lumen Output	840lm
LED Efficacy	70lm/W
Color Rendering Index	>90
Dimming	Non-Dimmable | Switched | Triac | 0 to 10V | DALI 2 | Bluetooth
Control Gear Location	Remote
Emergency Gear Location	Remote

DIMENSIONS

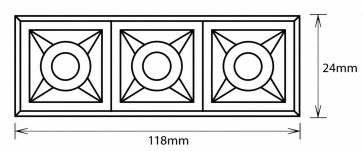

POLAR CURVE

LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

NOTES

Chrome Reflector as Standard, Custom Reflectors Available Upon Request

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

Certificate No:447672024

Housing Material	Aluminium
IP Rating	IP20
DALI Available	Yes
Dimension 1	118mm (L) x 42mm (W) x 54mm (H).
Mounting Type	Surface Mounted | Suspended
LED Lifetime	50,000h
Warranty	5 years

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024