Milo


MIL-80-ADJ-B-H-3K-3-ND-REC



DESCRIPTION

The MILO is an 80mm diameter LED downlight featuring a set-back reflector for reduced glare and visual comfort, achieving UGR<19. Delivering an efficacy of 95lm/W and CRI95+ for excellent colour rendering, it offers a choice of beam angles (15°, 24°, 38°, 60°) for focused accent lighting or wider illumination. Available in recessed and plaster-in mounting options, the range includes an IP65 fixed version and an IP20 adjustable version. DALI 2, Triac and other dimming protocols provide adaptable lighting control.

DIMENSIONS

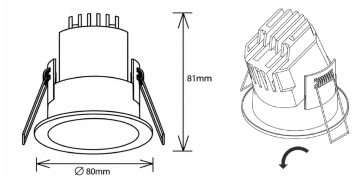

POLAR CURVE

LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

Certificate No:447672024

SPECIFICATIONS

Dimensions	⌀ 80mm x H81mm
Input Voltage	AC 220-240V
Lumen Output	853lm | 1024lm
LED Efficacy	85.3lm/W
UGR	UGR<19
Color Rendering Index	>95+
Dimming	Non-Dimmable | Switched | Triac | 0 to 10V | DALI 2 | Bluetooth
Control Gear Location	Remote
Housing Material	Aluminium
IP Rating	IP20
Dimension 1	⌀ 80mm x H81mm
Cut Out	⌀ 68-70mm
Mounting Type	Recessed
LED Lifetime	50,000h
Warranty	5 years

NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™
Citation ISO Certification Integrated Management System ISO 9001: 2015 ISO 14001: 2015 REGISTERED
Certificate No:447672024