ExcelsiorRing

EXCRING-1000-25-H-B-4K-ND



DESCRIPTION

The EXCELSIOR-RING range brings a distinctive circular form to architectural lighting, with a choice of diameters and widths to suit different spaces. Its aluminium housing supports effective thermal management, while uniform illumination creates a continuous ring of light with no dark areas. Delivering a standard efficacy of 80lm/W, the range offers CRI Ra>80 as standard, with Ra>90 available for applications requiring enhanced colour rendering.

IP20

SPECIFICATIONS

Dimensions	1000mm (Dia) x 25mm (W) x 26mm (H)
Input Voltage	AC 220-240V
Lumen Output	2720lm
Dimming	Switched | Triac | DALI 2
Housing Material	Aluminium
IP Rating	IP20
DALI Available	Yes
Dimension 1	1000mm (Dia) x 25mm (W) x 26mm (H)
Mounting Type	Suspended

DIMENSIONS

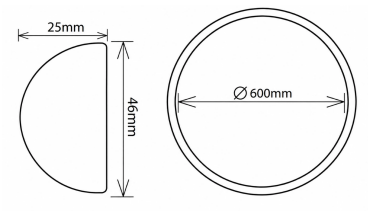

POLAR CURVE

LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™
Citation ISO Certification ISO 9001: 2015 ISO 14001: 2015 REGISTERED
Certificate No:447672024

LED Lifetime	50,000h
Warranty	5 years

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024