# ExcelsiorRing

EXCRING-1000-25-H-B-4K-DA



## DESCRIPTION

The EXCELSIOR-RING range brings a distinctive circular form to architectural lighting, with a choice of diameters and widths to suit different spaces. Its aluminium housing supports effective thermal management, while uniform illumination creates a continuous ring of light with no dark areas. Delivering a standard efficacy of 80lm/W, the range offers CRI Ra>80 as standard, with Ra>90 available for applications requiring enhanced colour rendering.

IP20

## SPECIFICATIONS

| | |
|---|---|
| Dimensions | 1000mm (Dia) x 25mm (W) x 26mm (H) |
| Input Voltage | AC 220-240V |
| Lumen Output | 2720lm |
| Dimming | Switched \| Triac \| DALI 2 |
| Housing Material | Aluminium |
| IP Rating | IP20 |
| DALI Available | Yes |
| Dimension 1 | 1000mm (Dia) x 25mm (W) x 26mm (H) |
| Mounting Type | Suspended |

## DIMENSIONS

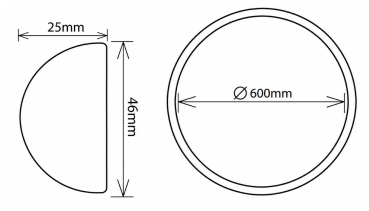


## POLAR CURVE

## LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

## NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™
Citation ISO Certification ISO 9001: 2015 ISO 14001: 2015 REGISTERED
Certificate No:447672024

| | |
|---|---|
| LED Lifetime | 50,000h |
| Warranty | 5 years |

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024