Clematis

CLM-TM-W-EMD



DESCRIPTION

The CLEMATIS is a 240V track-mounted emergency fitting providing non-maintained operation, suitable for 6-wire 3-circuit track systems. It delivers 220lm with a 5000K colour temperature and CRI70. An IP20 rating makes it suitable for indoor use, while a LiFePO4 battery supports a long service life.

IP20

SPECIFICATIONS

Dimensions	L231.6mm x H113.8mm x W63mm
Input Voltage	AC 220-240V
Lumen Output	220lm
LED Efficacy	62.85lm/W
Color Rendering Index	>70
Control Gear Location	Integral

DIMENSIONS

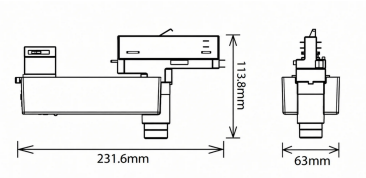

POLAR CURVE

LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™
Citation ISO Certification ISO 9001: 2015 ISO 14001: 2015 REGISTERED
Certificate No:447672024

Emergency Gear Location	Integral
Housing Material	Polycarbonate
IP Rating	IP20
Dimension 1	L231.6mm x H113.8mm x W63mm
Mounting Type	Track Mounted
Battery Pack	LiFePO46.4V1500mAh
LED Lifetime	50,000h
Warranty	5 years

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024