# Clematis

CLM-TM-B-EMD



## DESCRIPTION

The CLEMATIS is a 240V track-mounted emergency fitting providing non-maintained operation, suitable for 6-wire 3-circuit track systems. It delivers 220lm with a 5000K colour temperature and CRI70. An IP20 rating makes it suitable for indoor use, while a LiFePO4 battery supports a long service life.

IP20

## SPECIFICATIONS

| | |
|---|---|
| Dimensions | L231.6mm x H113.8mm x W63mm |
| Input Voltage | AC 220-240V |
| Lumen Output | 220lm |
| LED Efficacy | 62.85lm/W |
| Color Rendering Index | >70 |
| Control Gear Location | Integral |

## DIMENSIONS

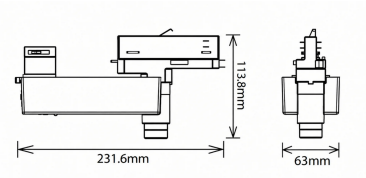


## POLAR CURVE

## LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

## NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™
Citation ISO Certification ISO 9001: 2015 ISO 14001: 2015 REGISTERED
Certificate No:447672024

| | |
|---|---|
| Emergency Gear Location | Integral |
| Housing Material | Polycarbonate |
| IP Rating | IP20 |
| Dimension 1 | L231.6mm x H113.8mm x W63mm |
| Mounting Type | Track Mounted |
| Battery Pack | LiFePO46.4V1500mAh |
| LED Lifetime | 50,000h |
| Warranty | 5 years |

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024