Tana

TAN-175-B-BR-H-3K-1-TR



DESCRIPTION


The TANA is a recessed square LED downlight, available in two sizes with an efficacy of 120lm/W. A choice of beam angles (24°, 36°, 60°) allows for focused accent lighting or wider illumination, with UGR<19 achievable depending on the size and beam angle selected. DALI 2, Triac and other dimming options provide adaptable lighting control, while IP54 and IK06 ratings offer protection against dust, splashing water and mechanical impact.

UK CA CE RoHS IP54 Waterproof DALI 2

SPECIFICATIONS

Dimensions	175mm x 175mm x H96mm
Input Voltage	AC 220-240V
Lumen Output	2160lm | 3000lm | 4200lm
LED Efficacy	120lm/W
Color Rendering Index	>80
Dimming	Non-Dimmable | Switched | Triac | 0 to 10V | DALI 2 | Bluetooth
Control Gear Location	Remote
Emergency Gear Location	Remote

DIMENSIONS

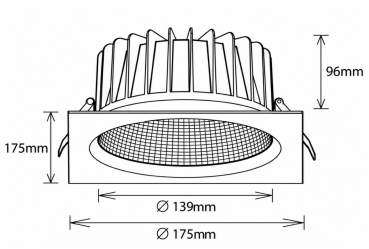

POLAR CURVE

LUMINAIRE FINISHES

Body W / B / S / R - Custom RAL

NOTES

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification ISO 9001: 2015 ISO 14001: 2015 REGISTERED

Certificate No:447672024

Housing Material	Aluminium
IP Rating	IP54
IK Rating	IK06
DALI Available	Yes
Dimension 1	175mm x 175mm x H96mm
Cut Out	150-160mm
Mounting Type	Recessed
LED Lifetime	50,000h
Warranty	5 years

DRK Lighting LTD
Unit 2, Silverglade Business Park,
Leatherhead Road, Chessington,
KT9 2QL

info@drklighting.co.uk
+44 (0)207 018 2202
www.drklighting.co.uk

bsi Certified Remanufacturer KITEMARK™

Citation ISO Certification
Integrated Management System
ISO 9001: 2015
ISO 14001: 2015
REGISTERED
Certificate No:447672024