

DRK LIGHTING

Simply doing the impossible!

Since 2014

ABOUT US

DRK Lighting has specialised in Commercial and Industrial LED lighting since 2014.

We are a passionate and diverse entity that offers Full Lighting package VE options, bespoke made Linear and LED strip, full Refurbishment of existing fittings and comprehensive upgrades and EM conversions.

Our robust client base is comprised of best of breed companies whom we have built strong relationships with and enhanced our own reputation for integrity and efficiency. The DRK brand has established itself quickly within the Electrical Contractor sector for its responsive communication, diligence and consistency for hitting deadlines. It is our mission to deliver state-of-the-art quality fittings and high-end components, all with 5 year minimum warranties, backed up by a dedicated team delivering a comprehensive after-sales service.

Our relationships have been built on trust and throughout our rapid growth we have always future-proofed our expansion by acquiring manpower with like-minded ambition and strong skill-sets to expand our knowledge and create opportunities to flex and pivot our business model. DRK is a dynamic group of talented individuals with ever-increasing capability to deliver uncompromising performance and an unrivalled, rarely matched, competitive pricing policy



CONTENTS

Linear Systems	Page 2 - 13
Single Colour LED strip	Page 14 - 20
RGB, RGBW & Tuneable LED Strip	Page 21 - 25
Flexible LED Neon	Page 26 - 30
Aluminium Extrusions	Page 31 - 38

Eternity Linear System



Eternity Surface 50

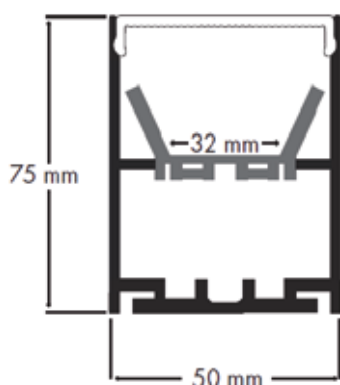


- Finish
- B Black
- W White
- Al Aluminium
- C Custom RAL

- Kelvin
- IN 2700K
- WW 3000K
- CW 4000K
- D 6000K

- Emergency
- ST Standard 3 hour
- DA DALI 3 hour
- Beam Angle
- 110°



- Dimming
- T Triac
- 1/10 1-10v
- DA DALI



Specification	Eternity 20w/m	Eternity 30w/m	Eternity 40w/m
System Power	20W/m	30W/m	40W/m
LED Chipset	Osram LED	Osram LED	Osram LED
Driver Manufacture	KGP	KGP	KGP
Colour Rendering Index	92+	92+	92+
Lumen Output	2000Lm/m	3280Lm/m	4000Lm/m
LED Efficacy	100Lm/cW	109Lm/cW	100Lm/cW
IP Rating	IP20	IP20	IP20
IK Rating	IK04	IK04	IK04
Housing Material	Aluminium	Aluminium	Aluminium
Diffuser Material	Polycarbonate / Micro Prism	Polycarbonate / Micro Prism	Polycarbonate / Micro Prism
Operating Temperature	-40° to +60° C	-40° to +60° C	-40° to +60° C
Input Voltage	AC 220-240V	AC 220-240V	AC 220-240V
Dimensions	50mm x75mm x Various	50mm x75mm x Various	50mm x75mm x Various

Specification	Eternity HO 30w/m	Eternity HO 44w/m	Eternity HO 44w/m
System Power	30W/m	44W/m	44W/m
LED Chipset	Osram LED	Osram LED	Osram LED
Driver Manufacture	KGP	KGP	KGP
Colour Rendering Index	92+	80+	92+
Lumen Output	4050Lm/m	8360Lm/m	5200Lm/m
LED Efficacy	135Lm/cW	190Lm/cW	118Lm/cW
IP Rating	IP20	IP20	IP20
IK Rating	IK04	IK04	IK04
Housing Material	Aluminium	Aluminium	Aluminium
Diffuser Material	Polycarbonate / Micro Prism	Polycarbonate / Micro Prism	Polycarbonate / Micro Prism
Operating Temperature	-40° to +60° C	-40° to +60° C	-40° to +60° C
Input Voltage	AC 220-240V	AC 220-240V	AC 220-240V
Dimensions	50mm x75mm x Various	50mm x75mm x Various	50mm x75mm x Various

Eternity Surface 35




- Finish**
 - B Black
 - W White
 - Al Aluminium
 - C Custom RAL
- Kelvin**
 - IN 2700K
 - WW 3000K
 - CW 4000K
 - D 6000K
- Emergency**
 - ST Standard 3 hour
 - DA DALI 3 hour
- Beam Angle**
 - 110°
- Dimming**
 - T Triac
 - 1/10 1-10v
 - DA DALI



Specification	Eternity 20w/m	Eternity 30w/m	Eternity 40w/m
System Power	20W/m	30W/m	40W/m
LED Chipset	Osram LED	Osram LED	Osram LED
Driver Manufacture	KGP	KGP	KGP
Colour Rendering Index	92+	92+	92+
Lumen Output	2000Lm/m	3280Lm/m	4000Lm/m
LED Efficacy	100Lm/cW	109Lm/cW	100Lm/cW
IP Rating	IP20	IP20	IP20
IK Rating	IK04	IK04	IK04
Housing Material	Aluminium	Aluminium	Aluminium
Diffuser Material	Polycarbonate	Polycarbonate	Polycarbonate
Operating Temperature	-40° to +60° C	-40° to +60° C	-40° to +60° C
Input Voltage	AC 220-240V	AC 220-240V	AC 220-240V
Dimensions	35mm x35mm x Various	35mm x35mm x Various	35mm x35mm x Various

Specification	Eternity HO 22w/m	Eternity HO 44w/m	Eternity HO 44w/m
System Power	22W/m	44W/m	44W/m
LED Chipset	Osram LED	Osram LED	Osram LED
Driver Manufacture	KGP	KGP	KGP
Colour Rendering Index	92+	80+	92+
Lumen Output	2600Lm/m	8360Lm/m	5200Lm/m
LED Efficacy	118Lm/cW	190Lm/cW	118Lm/cW
IP Rating	IP20	IP20	IP20
IK Rating	IK04	IK04	IK04
Housing Material	Aluminium	Aluminium	Aluminium
Diffuser Material	Polycarbonate	Polycarbonate	Polycarbonate
Operating Temperature	-40° to +60° C	-40° to +60° C	-40° to +60° C
Input Voltage	AC 220-240V	AC 220-240V	AC 220-240V
Dimensions	35mm x35mm x Various	35mm x35mm x Various	35mm x35mm x Various

Eternity Surface 75

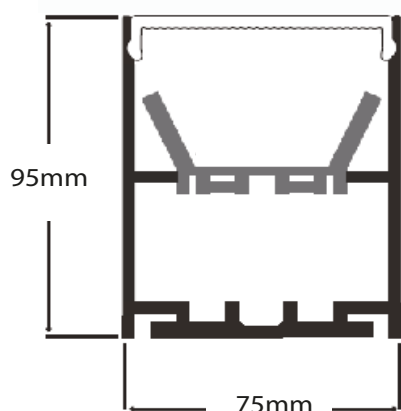

- Finish**
 - B Black
 - W White
 - Al Aluminium
 - C Custom RAL
- Kelvin**
 - IN 2700K
 - WW 3000K
 - CW 4000K
 - D 6000K
- Emergency**
 - ST Standard 3 hour
 - DA DALI 3 hour
- Beam Angle**
 - 110°
- Dimming**
 - T Triac
 - 1/10 1-10v
 - DA DALI




Specification	Eternity 20w/m	Eternity 30w/m	Eternity 40w/m
System Power	20W/m	30W/m	40W/m
LED Chipset	Osram LED	Osram LED	Osram LED
Driver Manufacture	KGP	KGP	KGP
Colour Rendering Index	92+	92+	92+
Lumen Output	2000Lm/m	3280Lm/m	4000Lm/m
LED Efficacy	100Lm/cW	109Lm/cW	100Lm/cW
IP Rating	IP20	IP20	IP20
IK Rating	IK04	IK04	IK04
Housing Material	Aluminium	Aluminium	Aluminium
Diffuser Material	Polycarbonate	Polycarbonate	Polycarbonate
Operating Temperature	-40° to +60° C	-40° to +60° C	-40° to +60° C
Input Voltage	AC 220-240V	AC 220-240V	AC 220-240V
Dimensions	75mm x 95mm x Various	75mm x 95mm x Various	75mm x 95mm x Various

Specification	Eternity HO 30w/m	Eternity HO 44w/m	Eternity HO 44w/m
System Power	30W/m	44W/m	44W/m
LED Chipset	Osram LED	Osram LED	Osram LED
Driver Manufacture	KGP	KGP	KGP
Colour Rendering Index	92+	80+	92+
Lumen Output	4050Lm/m	8360Lm/m	5200Lm/m
LED Efficacy	135Lm/cW	190Lm/cW	118Lm/cW
IP Rating	IP20	IP20	IP20
IK Rating	IK04	IK04	IK04
Housing Material	Aluminium	Aluminium	Aluminium
Diffuser Material	Polycarbonate	Polycarbonate	Polycarbonate
Operating Temperature	-40° to +60° C	-40° to +60° C	-40° to +60° C
Input Voltage	AC 220-240V	AC 220-240V	AC 220-240V
Dimensions	75mm x 95mm x Various	75mm x 95mm x Various	75mm x 95mm x Various



Eternity Recessed 50

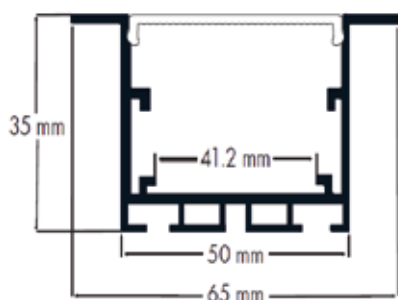

- Finish**
 - B Black
 - W White
 - Al Aluminium
 - C Custom RAL
- Kelvin**
 - IN 2700K
 - WW 3000K
 - CW 4000K
 - D 6000K
- Emergency**
 - ST Standard 3 hour
 - DA DALI 3 hour
- Beam Angle**
 - 110°
- Dimming**
 - T Triac
 - 1/10 1-10v
 - DA DALI

Dimmable

240V

5 Year

3 Step MacAdam


CRI 90+

UGR<19

Specification	Eternity 20w/m	Eternity 30w/m	Eternity 40w/m
System Power	20W/m	30W/m	40W/m
LED Chipset	Osram LED	Osram LED	Osram LED
Driver Manufacture	KGP	KGP	KGP
Colour Rendering Index	92+	92+	92+
Lumen Output	2000Lm/m	3280Lm/m	4000Lm/m
LED Efficacy	100Lm/cW	109Lm/cW	100Lm/cW
IP Rating	IP20	IP20	IP20
IK Rating	IK04	IK04	IK04
Housing Material	Aluminium	Aluminium	Aluminium
Diffuser Material	Polycarbonate / Micro Prism	Polycarbonate / Micro Prism	Polycarbonate / Micro Prism
Operating Temperature	-40° to +60° C	-40° to +60° C	-40° to +60° C
Input Voltage	AC 220-240V	AC 220-240V	AC 220-240V
Dimensions	65mm x35mm x Various	65mm x35mm x Various	65mm x35mm x Various

Specification	Eternity HO 30w/m	Eternity HO 44w/m	Eternity HO 44w/m
System Power	30W/m	44W/m	44W/m
LED Chipset	Osram LED	Osram LED	Osram LED
Driver Manufacture	KGP	KGP	KGP
Colour Rendering Index	92+	80+	92+
Lumen Output	4050Lm/m	8360Lm/m	5200Lm/m
LED Efficacy	135Lm/cW	190Lm/cW	118Lm/cW
IP Rating	IP20	IP20	IP20
IK Rating	IK04	IK04	IK04
Housing Material	Aluminium	Aluminium	Aluminium
Diffuser Material	Polycarbonate / Micro Prism	Polycarbonate / Micro Prism	Polycarbonate / Micro Prism
Operating Temperature	-40° to +60° C	-40° to +60° C	-40° to +60° C
Input Voltage	AC 220-240V	AC 220-240V	AC 220-240V
Dimensions	65mm x35mm x Various	65mm x35mm x Various	65mm x35mm x Various

Eternity Recessed 35

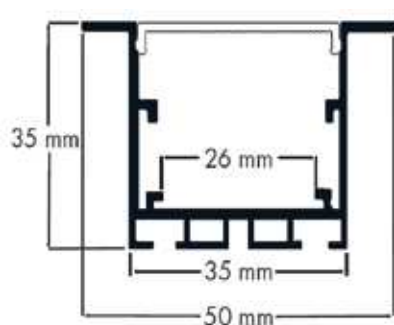

- Finish
- B Black
- W White
- Al Aluminium
- C Custom RAL

- Kelvin
- IN 2700K
- WW 3000K
- CW 4000K
- D 6000K

- Emergency
- ST Standard 3 hour
- DA DALI 3 hour
- Beam Angle
- 110°

- Dimming
- T Triac
- 1/10 1-10v
- DA DALI




Specification	Eternity 20w/m	Eternity 30w/m	Eternity 40w/m
System Power	20W/m	30W/m	40W/m
LED Chipset	Osram LED	Osram LED	Osram LED
Driver Manufacture	KGP	KGP	KGP
Colour Rendering Index	92+	92+	92+
Lumen Output	2000Lm/m	3280Lm/m	4000Lm/m
LED Efficacy	100Lm/cW	109Lm/cW	100Lm/cW
IP Rating	IP20	IP20	IP20
IK Rating	IK04	IK04	IK04
Housing Material	Aluminium	Aluminium	Aluminium
Diffuser Material	Polycarbonate	Polycarbonate	Polycarbonate
Operating Temperature	-40° to +60° C	-40° to +60° C	-40° to +60° C
Input Voltage	AC 220-240V	AC 220-240V	AC 220-240V
Dimensions	50mm x35mm x Various	50mm x35mm x Various	50mm x35mm x Various

Specification	Eternity HO 22w/m	Eternity HO 44w/m	Eternity HO 44w/m
System Power	22W/m	44W/m	44W/m
LED Chipset	Osram LED	Osram LED	Osram LED
Driver Manufacture	KGP	KGP	KGP
Colour Rendering Index	92+	80+	92+
Lumen Output	2600Lm/m	8360Lm/m	5200Lm/m
LED Efficacy	118Lm/cW	190Lm/cW	118Lm/cW
IP Rating	IP20	IP20	IP20
IK Rating	IK04	IK04	IK04
Housing Material	Aluminium	Aluminium	Aluminium
Diffuser Material	Polycarbonate	Polycarbonate	Polycarbonate
Operating Temperature	-40° to +60° C	-40° to +60° C	-40° to +60° C
Input Voltage	AC 220-240V	AC 220-240V	AC 220-240V
Dimensions	50mm x35mm x Various	50mm x35mm x Various	50mm x35mm x Various



Eternity Suspended 50

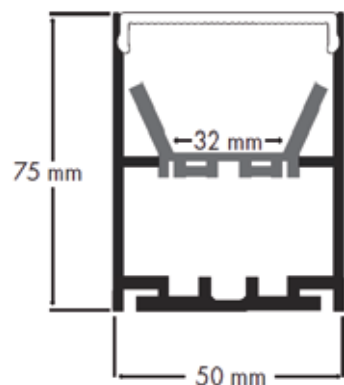


- Finish
- B Black
- W White
- Al Aluminium
- C Custom RAL

- Kelvin
- IN 2700K
- WW 3000K
- CW 4000K
- D 6000K

- Emergency
- ST Standard 3 hour
- DA DALI 3 hour
- Beam Angle
- 110°



- Dimming
- T Triac
- 1/10 1-10v
- DA DALI



Specification	Eternity 20w/m	Eternity 30w/m	Eternity 40w/m
System Power	20W/m	30W/m	40W/m
LED Chipset	Osram LED	Osram LED	Osram LED
Driver Manufacture	KGP	KGP	KGP
Colour Rendering Index	92+	92+	92+
Lumen Output	2000Lm/m	3280Lm/m	4000Lm/m
LED Efficacy	100Lm/cW	109Lm/cW	100Lm/cW
IP Rating	IP20	IP20	IP20
IK Rating	IK04	IK04	IK04
Housing Material	Aluminium	Aluminium	Aluminium
Diffuser Material	Polycarbonate / Micro Prism	Polycarbonate / Micro Prism	Polycarbonate / Micro Prism
Operating Temperature	-40° to +60° C	-40° to +60° C	-40° to +60° C
Input Voltage	AC 220-240V	AC 220-240V	AC 220-240V
Dimensions	50mm x75mm x Various	50mm x75mm x Various	50mm x75mm x Various

Specification	Eternity HO 30w/m	Eternity HO 44w/m	Eternity HO 44w/m
System Power	30W/m	44W/m	44W/m
LED Chipset	Osram LED	Osram LED	Osram LED
Driver Manufacture	KGP	KGP	KGP
Colour Rendering Index	92+	80+	92+
Lumen Output	4050Lm/m	8360Lm/m	5200Lm/m
LED Efficacy	135Lm/cW	190Lm/cW	118Lm/cW
IP Rating	IP20	IP20	IP20
IK Rating	IK04	IK04	IK04
Housing Material	Aluminium	Aluminium	Aluminium
Diffuser Material	Polycarbonate / Micro Prism	Polycarbonate / Micro Prism	Polycarbonate / Micro Prism
Operating Temperature	-40° to +60° C	-40° to +60° C	-40° to +60° C
Input Voltage	AC 220-240V	AC 220-240V	AC 220-240V
Dimensions	50mm x75mm x Various	50mm x75mm x Various	50mm x75mm x Various

Eternity Suspended 35

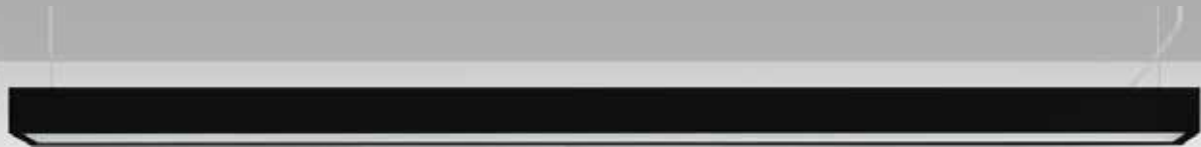



- Finish**
 - B Black
 - W White
 - Al Aluminium
 - C Custom RAL
- Kelvin**
 - IN 2700K
 - WW 3000K
 - CW 4000K
 - D 6000K
- Emergency**
 - ST Standard 3 hour
 - DA DALI 3 hour
- Beam Angle**
 - 110°
- Dimming**
 - T Triac
 - 1/10 1-10v
 - DA DALI



Specification	Eternity 20w/m	Eternity 30w/m	Eternity 40w/m
System Power	20W/m	30W/m	40W/m
LED Chipset	Osram LED	Osram LED	Osram LED
Driver Manufacture	KGP	KGP	KGP
Colour Rendering Index	92+	92+	92+
Lumen Output	2000Lm/m	3280Lm/m	4000Lm/m
LED Efficacy	100Lm/cW	109Lm/cW	100Lm/cW
IP Rating	IP20	IP20	IP20
IK Rating	IK04	IK04	IK04
Housing Material	Aluminium	Aluminium	Aluminium
Diffuser Material	Polycarbonate	Polycarbonate	Polycarbonate
Operating Temperature	-40° to +60° C	-40° to +60° C	-40° to +60° C
Input Voltage	AC 220-240V	AC 220-240V	AC 220-240V
Dimensions	35mm x35mm x Various	35mm x35mm x Various	35mm x35mm x Various

Specification	Eternity HO 22w/m	Eternity HO 44w/m	Eternity HO 44w/m
System Power	22W/m	44W/m	44W/m
LED Chipset	Osram LED	Osram LED	Osram LED
Driver Manufacture	KGP	KGP	KGP
Colour Rendering Index	92+	80+	92+
Lumen Output	2600Lm/m	8360Lm/m	5200Lm/m
LED Efficacy	118Lm/cW	190Lm/cW	118Lm/cW
IP Rating	IP20	IP20	IP20
IK Rating	IK04	IK04	IK04
Housing Material	Aluminium	Aluminium	Aluminium
Diffuser Material	Polycarbonate	Polycarbonate	Polycarbonate
Operating Temperature	-40° to +60° C	-40° to +60° C	-40° to +60° C
Input Voltage	AC 220-240V	AC 220-240V	AC 220-240V
Dimensions	35mm x35mm x Various	35mm x35mm x Various	35mm x35mm x Various

Eternity Suspended 75

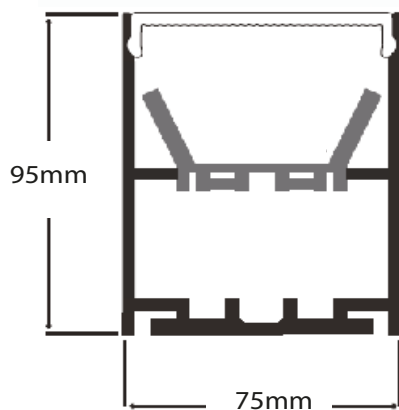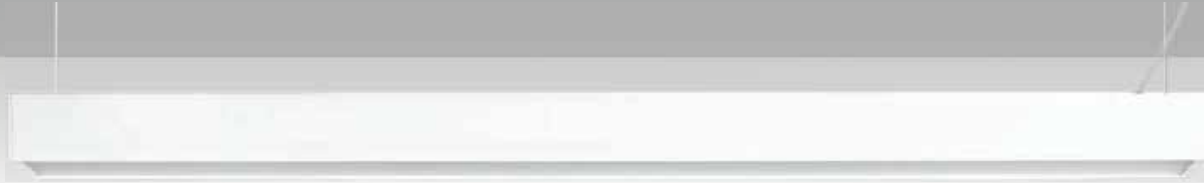



- Finish**
 - B Black
 - W White
 - Al Aluminium
 - C Custom RAL
- Kelvin**
 - IN 2700K
 - WW 3000K
 - CW 4000K
 - D 6000K
- Emergency**
 - ST Standard 3 hour
 - DA DALI 3 hour
- Beam Angle**
 - 110°
- Dimming**
 - T Triac
 - 1/10 1-10v
 - DA DALI



Specification	Eternity 20w/m	Eternity 30w/m	Eternity 40w/m
System Power	20W/m	30W/m	40W/m
LED Chipset	Osram LED	Osram LED	Osram LED
Driver Manufacture	KGP	KGP	KGP
Colour Rendering Index	92+	92+	92+
Lumen Output	2000Lm/m	3280Lm/m	4000Lm/m
LED Efficacy	100Lm/cW	109Lm/cW	100Lm/cW
IP Rating	IP20	IP20	IP20
IK Rating	IK04	IK04	IK04
Housing Material	Aluminium	Aluminium	Aluminium
Diffuser Material	Polycarbonate	Polycarbonate	Polycarbonate
Operating Temperature	-40° to +60° C	-40° to +60° C	-40° to +60° C
Input Voltage	AC 220-240V	AC 220-240V	AC 220-240V
Dimensions	75mm x95mm x Various	75mm x95mm x Various	75mm x95mm x Various

Specification	Eternity HO 30w/m	Eternity HO 44w/m	Eternity HO 44w/m
System Power	30W/m	44W/m	44W/m
LED Chipset	Osram LED	Osram LED	Osram LED
Driver Manufacture	KGP	KGP	KGP
Colour Rendering Index	92+	80+	92+
Lumen Output	4050Lm/m	8360Lm/m	5200Lm/m
LED Efficacy	135Lm/cW	190Lm/cW	118Lm/cW
IP Rating	IP20	IP20	IP20
IK Rating	IK04	IK04	IK04
Housing Material	Aluminium	Aluminium	Aluminium
Diffuser Material	Polycarbonate	Polycarbonate	Polycarbonate
Operating Temperature	-40° to +60° C	-40° to +60° C	-40° to +60° C
Input Voltage	AC 220-240V	AC 220-240V	AC 220-240V
Dimensions	75mm x95mm x Various	75mm x95mm x Various	75mm x95mm x Various

Eternity Direct / Indirect Suspended 50

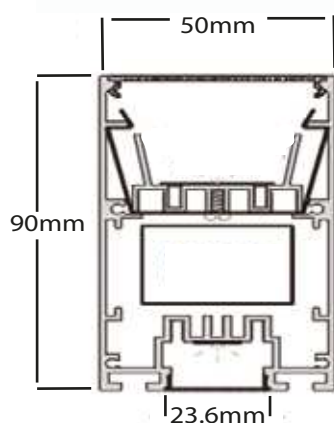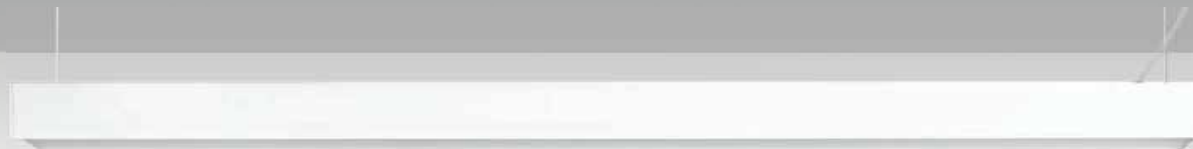


- Finish**
 - B Black
 - W White
 - Al Aluminium
 - C Custom RAL
- Kelvin**
 - IN 2700K
 - WW 3000K
 - CW 4000K
 - D 6000K
- Emergency**
 - ST Standard 3 hour
 - DA DALI 3 hour
- Beam Angle**
 - 110°
- Dimming**
 - T Triac
 - 1/10 1-10v
 - DA DALI



Specification	Eternity 30w/m	Eternity 45w/m	Eternity 60w/m
System Power	D = 20W/m / IN = 10W/m	D = 30W/m / IN = 15W/m	D = 40W/m / IN = 20W/m
LED Chipset	Osram LED	Osram LED	Osram LED
Driver Manufacture	KGP	KGP	KGP
Colour Rendering Index	92+	92+	92+
Lumen Output	D = 2000Lm/m / IN = 1000Lm/m	D = 3280Lm/m / IN = 1640Lm/m	D = 4000Lm/m / IN = 2000Lm/m
LED Efficacy	100Lm/cW	109Lm/cW	100Lm/cW
IP Rating	IP20	IP20	IP20
IK Rating	IK04	IK04	IK04
Housing Material	Aluminium	Aluminium	Aluminium
Diffuser Material	Polycarbonate	Polycarbonate	Polycarbonate
Operating Temperature	-40° to +60° C	-40° to +60° C	-40° to +60° C
Input Voltage	AC 220-240V	AC 220-240V	AC 220-240V
Dimensions	50mm x 90mm x Various	50mm x 90mm x Various	50mm x 90mm x Various

Specification	Eternity HO 40w/m	Eternity HO 66w/m	Eternity HO 66w/m
System Power	D = 30W/m / IN = 10W/m	D = 44W/m / IN = 22W/m	D = 44W/m / IN = 22W/m
LED Chipset	Osram LED	Osram LED	Osram LED
Driver Manufacture	KGP	KGP	KGP
Colour Rendering Index	92+	80+	92+
Lumen Output	D = 4050Lm/m / IN = 1000Lm/m	D = 8360Lm/m / IN = 4180Lm/m	D = 5200Lm/m / IN = 2600Lm/m
LED Efficacy	135Lm/cW	190Lm/cW	118Lm/cW
IP Rating	IP20	IP20	IP20
IK Rating	IK04	IK04	IK04
Housing Material	Aluminium	Aluminium	Aluminium
Diffuser Material	Polycarbonate	Polycarbonate	Polycarbonate
Operating Temperature	-40° to +60° C	-40° to +60° C	-40° to +60° C
Input Voltage	AC 220-240V	AC 220-240V	AC 220-240V
Dimensions	50mm x 90mm x Various	50mm x 90mm x Various	50mm x 90mm x Various

Eternity Direct / Indirect Suspended 75

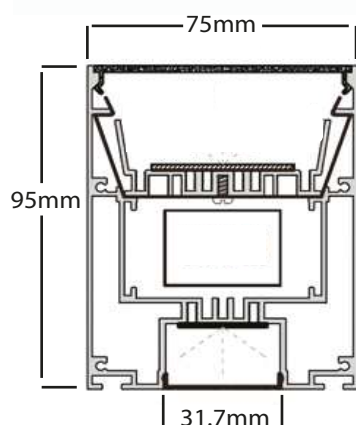

● Finish

B Black

W White

Al Aluminium

C Custom RAL

● Kelvin

IN 2700K

WW 3000K

CW 4000K

D 6000K

● Emergency

ST Standard 3 hour

DA DALI 3 hour

● Dimming

T Triac

1/10 1-10v

DA DALI

● Beam Angle

110°

Dimmable

240V


5 Year

3 Step MacAdam

CRI 90+

Specification	Eternity 30w/m	Eternity 45w/m	Eternity 60w/m
System Power	D = 20W/m / IN = 10W/m	D = 30W/m / IN = 10W/m	D = 40W/m / IN = 10W/m
LED Chipset	Osram LED	Osram LED	Osram LED
Driver Manufacture	KGP	KGP	KGP
Colour Rendering Index	92+	92+	92+
Lumen Output	D = 2000Lm/m / IN = 1000Lm/m	D = 3280Lm/m / IN = 1000Lm/m	D = 4000Lm/m / IN = 1000Lm/m
LED Efficacy	100Lm/cW	109Lm/cW	100Lm/cW
IP Rating	IP20	IP20	IP20
IK Rating	IK04	IK04	IK04
Housing Material	Aluminium	Aluminium	Aluminium
Diffuser Material	Polycarbonate	Polycarbonate	Polycarbonate
Operating Temperature	-40° to +60° C	-40° to +60° C	-40° to +60° C
Input Voltage	AC 220-240V	AC 220-240V	AC 220-240V
Dimensions	75mm x 95mm x Various	75mm x 95mm x Various	75mm x 95mm x Various

Specification	Eternity HO 40w/m	Eternity HO 66w/m	Eternity HO 66w/m
System Power	D = 30W/m / IN = 10W/m	D = 44W/m / IN = 22W/m	D = 44W/m / IN = 22W/m
LED Chipset	Osram LED	Osram LED	Osram LED
Driver Manufacture	KGP	KGP	KGP
Colour Rendering Index	92+	80+	92+
Lumen Output	D = 4050Lm/m / IN = 1000Lm/m	D = 8360Lm/m / IN = 4180Lm/m	D = 5200Lm/m / IN = 2600Lm/m
LED Efficacy	135Lm/cW	190Lm/cW	118Lm/cW
IP Rating	IP20	IP20	IP20
IK Rating	IK04	IK04	IK04
Housing Material	Aluminium	Aluminium	Aluminium
Diffuser Material	Polycarbonate	Polycarbonate	Polycarbonate
Operating Temperature	-40° to +60° C	-40° to +60° C	-40° to +60° C
Input Voltage	AC 220-240V	AC 220-240V	AC 220-240V
Dimensions	75mm x 95mm x Various	75mm x 95mm x Various	75mm x 95mm x Various

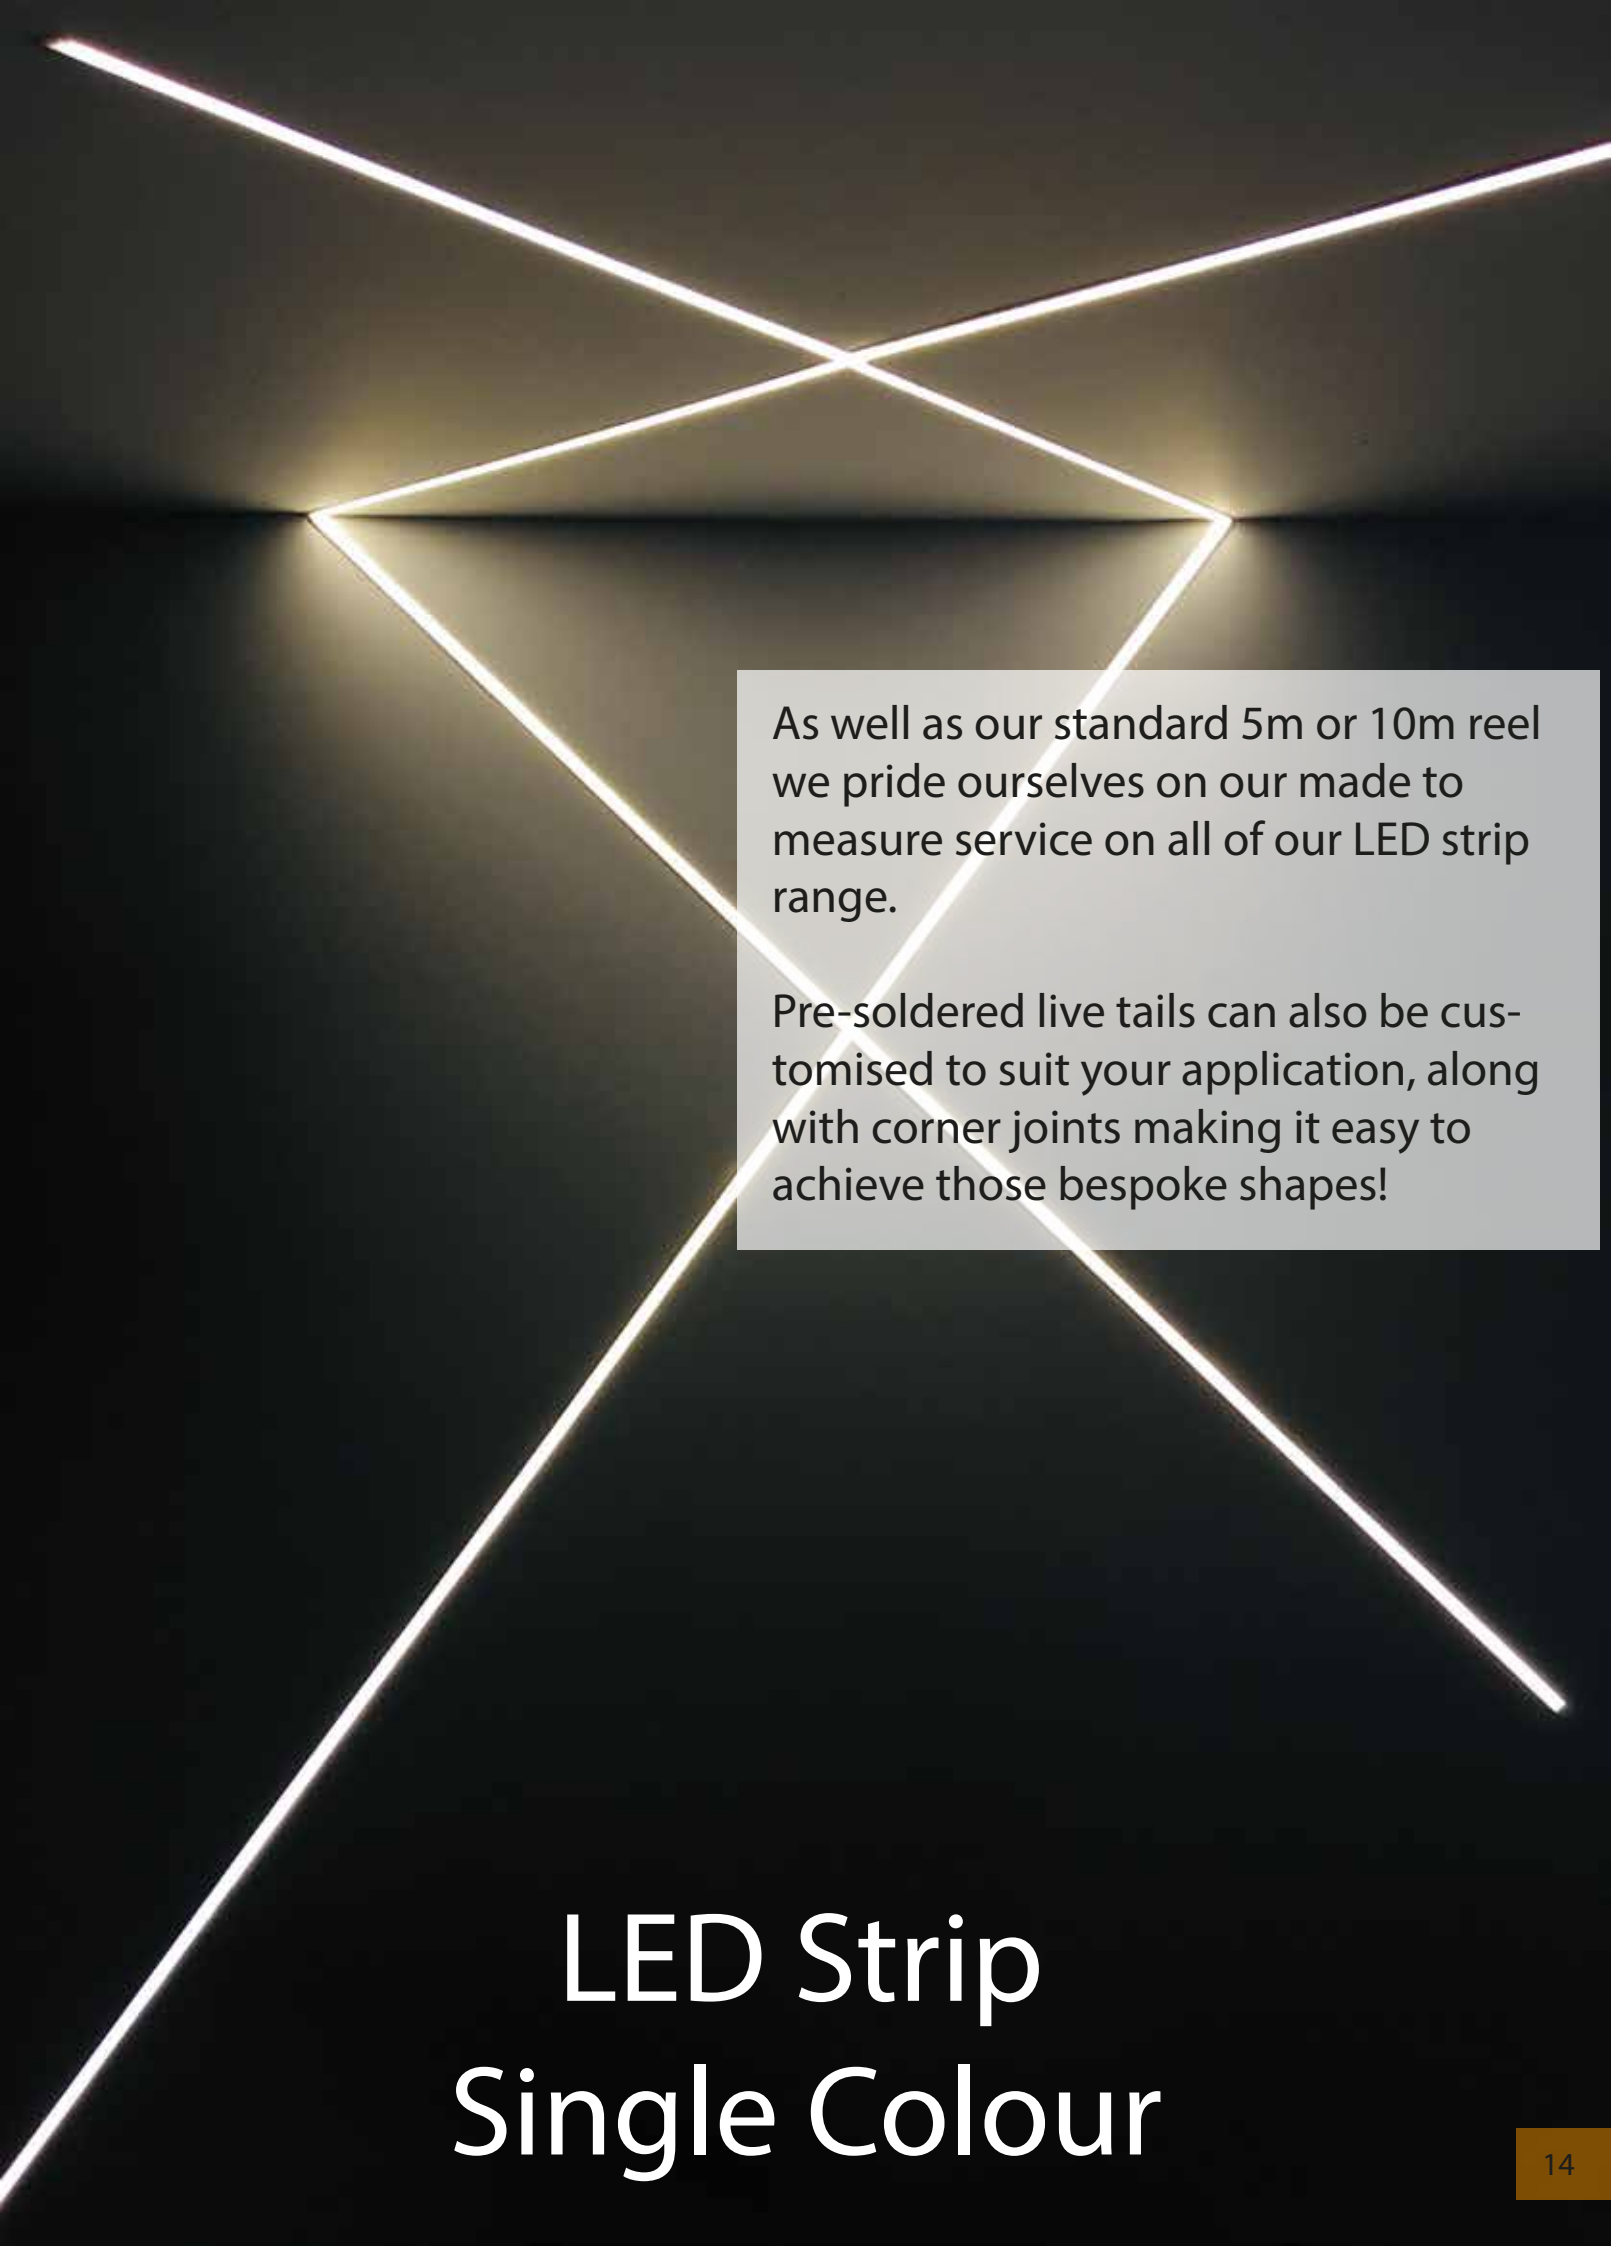A glowing yellow LED strip light is bent into a complex geometric shape, resembling a stylized 'X' or a series of interconnected triangles, against a dark background. The light is bright and creates a strong contrast with the dark surroundings.

As well as our standard 5m or 10m reel we pride ourselves on our made to measure service on all of our LED strip range.


Pre-soldered live tails can also be customised to suit your application, along with corner joints making it easy to achieve those bespoke shapes!

LED Strip Single Colour

5W | LED STRIP| 120 LEDs Per Metre



Colour Temperature	Lm Per M	IP Rating
2700K	430lm	IP20
3000K	450lm	IP20
4000K	520lm	IP20
6500K	600lm	IP20
2700K	430lm	IP65
3000K	450lm	IP65
4000K	520lm	IP65
6500K	600lm	IP65

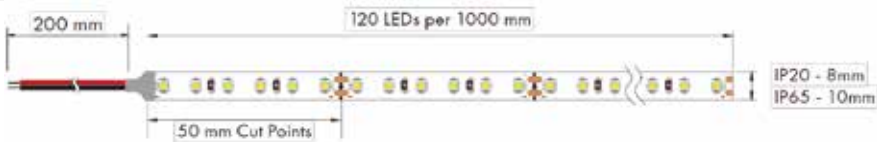


- Dimmable
- IP20
- IP65
- LM80
- 3 Step MacAdam
- CRI 90+
- Single Binning
- DC 24V
- 5 Year

Our 120 LED/m strips feature branded high efficiency 2835 SMD LEDs placed on a 2oz PCB board for a durable finish, complete with (3M 300LSE) self-adhesive for easy mounting.

5W | LED STRIP| 280 LEDs Per Metre



Colour Temperature	Lm Per M	IP Rating
2700K	445lm	IP20
3000K	470lm	IP20
4000K	510lm	IP20
6500K	545lm	IP20
2700K	445lm	IP65
3000K	470lm	IP65
4000K	510lm	IP65
6500K	545lm	IP65

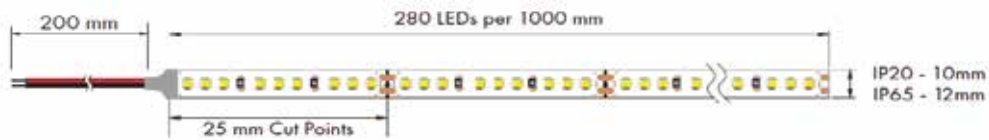


- Dimmable
- IP20
- IP65
- LM80
- 3 Step MacAdam
- CRI 95+
- Single Binning
- DC 24V
- 5 Year

Our high density 280 LED/m strips produce a seamless linear light finish when combined with any aluminium extrusion. This model features branded high efficiency 1808 SMD LEDs placed on a 2oz PCB board for a durable finish, complete with (3M 300LSE) self-adhesive for easy mounting.

10W | LED STRIP| 120 LEDs Per Metre



Colour Temperature	Lm Per M	IP Rating
2700K	780lm	IP20
3000K	820lm	IP20
4000K	900lm	IP20
6500K	980lm	IP20
2700K	780lm	IP65
3000K	820lm	IP65
4000K	900lm	IP65
6500K	980lm	IP65

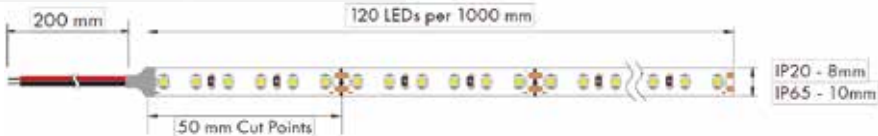


- Dimmable
- IP20
- IP65
- LM80
- 3 Step MacAdam
- CRI 90+
- Single Binning
- DC 24V
- 5 Year

Our 120 LED/m strips feature branded high efficiency 2835 SMD LEDs placed on a 2oz PCB board for a durable finish, complete with (3M 300LSE) self-adhesive for easy mounting.

10W | LED STRIP| 280 LEDs Per Metre



Colour Temperature	Lm Per M	IP Rating
2700K	890lm	IP20
3000K	940lm	IP20
4000K	1020lm	IP20
6500K	1090lm	IP20
2700K	890lm	IP65
3000K	940lm	IP65
4000K	1020lm	IP65
6500K	1090lm	IP65

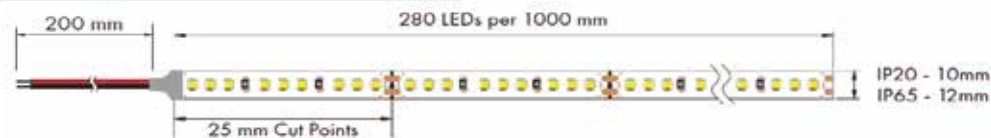


- Dimmable
- IP20
- IP65
- LM80
- 3 Step MacAdam
- CRI 95+
- Single Binning
- DC 24V
- 5 Year

Our high density 280 LED/m strips produce a seamless linear light finish when combined with any aluminium extrusion. This model features branded high efficiency 1808 SMD LEDs placed on a 2oz PCB board for a durable finish, complete with (3M 300LSE) self-adhesive for easy mounting.

15W | LED STRIP| 120 LEDs Per Metre



Colour Temperature	Lm Per M	IP Rating
2700K	1200lm	IP20
3000K	1250lm	IP20
4000K	1350lm	IP20
6500K	1400lm	IP20
2700K	1200lm	IP65
3000K	1250lm	IP65
4000K	1350lm	IP65
6500K	1400lm	IP65




- Dimmable
- IP20
- IP65
- LM80
- 3 Step MacAdam
- CRI 90+
- Single Binning
- DC 24V
- 5 Year

Our 120 LED/m strips feature branded high efficiency 2835 SMD LEDs placed on a 2oz PCB board for a durable finish, complete with (3M 300LSE) self-adhesive for easy mounting.

15W | LED STRIP| 280 LEDs Per Metre



Colour Temperature	Lm Per M	IP Rating
2700K	1410lm	IP20
3000K	1530lm	IP20
4000K	1640lm	IP20
2700K	1410lm	IP65
3000K	1530lm	IP65
4000K	1640lm	IP65

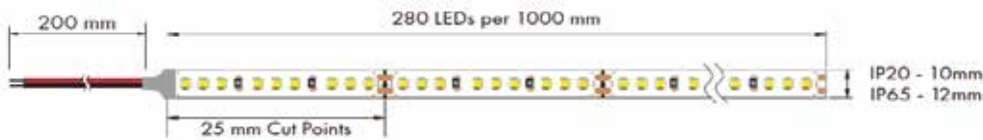


- Dimmable
- IP20
- IP65
- LM80
- 3 Step MacAdam
- CRI 95+
- Single Binning
- DC 24V
- 5 Year

Our high density 280 LED/m strips produce a seamless linear light finish when combined with any aluminium extrusion. This model features branded high efficiency 1808 SMD LEDs placed on a 2oz PCB board for a durable finish, complete with (3M 300LSE) self-adhesive for easy mounting.

20W | LED STRIP| 120 LEDs Per Metre



Colour Temperature	Lm Per M	IP Rating
2700K	1620lm	IP20
3000K	1700lm	IP20
4000K	1800lm	IP20
6500K	1860lm	IP20
2700K	1620lm	IP65
3000K	1700lm	IP65
4000K	1800lm	IP65
6500K	1860lm	IP65

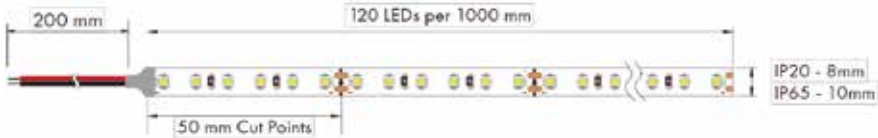


- Dimmable
- IP20
- IP65
- LM80
- 3 Step MacAdam
- CRI 90+
- Single Binning
- DC 24V
- 5 Year

Our 120 LED/m strips feature branded high efficiency 2835 SMD LEDs placed on a 2oz PCB board for a durable finish, complete with (3M 300LSE) self-adhesive for easy mounting.

20W | LED STRIP| 280 LEDs Per Metre



Colour Temperature	Lm Per M	IP Rating
2700K	1880lm	IP20
3000K	2040lm	IP20
4000K	2180lm	IP20
2700K	1880lm	IP65
3000K	2040lm	IP65
4000K	2180lm	IP65

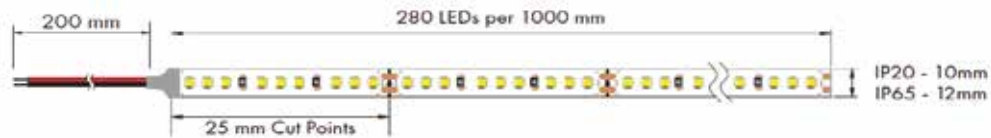


- Dimmable
- IP20
- IP65
- LM80
- 3 Step MacAdam
- CRI 95+
- Single Binning
- DC 24V
- 5 Year

Our high density 280 LED/m strips produce a seamless linear light finish when combined with any aluminium extrusion. This model features branded high efficiency 1808 SMD LEDs placed on a 2oz PCB board for a durable finish, complete with (3M 300LSE) self-adhesive for easy mounting.

22W | LED STRIP| 192 LEDs Per Metre CRI 82+



Colour Temperature	Lm Per M	IP Rating
3000K	3502lm	IP20
4000K	3700lm	IP20

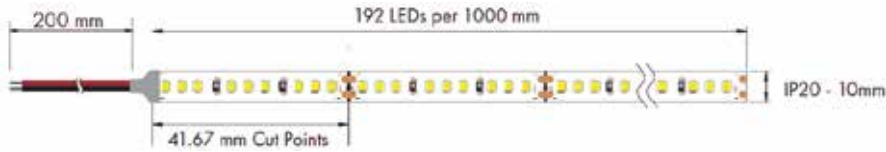


- Dimmable
- IP20
- LM80
- 3 Step MacAdam
- CRI 82+
- Single Binning
- DC 24V
- 5 Year

Our high power strips feature branded ultra-high efficiency 2835 SMD LEDs placed on an extra thick 3oz PCB board for a durable finish, complete with (3M 300LSE) self-adhesive for easy mounting.

22W | LED STRIP| 192 LEDs Per Metre CRI 92+



Colour Temperature	Lm Per M	IP Rating
3000K	2880lm	IP20
4000K	3000lm	IP20

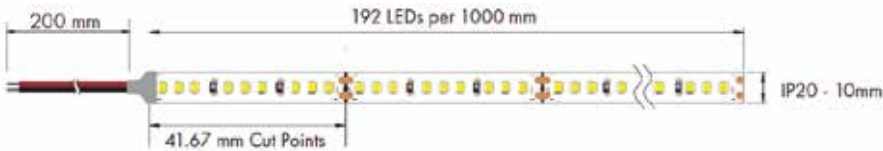


- Dimmable
- IP20
- LM80
- 3 Step MacAdam
- CRI 82+
- Single Binning
- DC 24V
- 5 Year

Our high power strips feature branded ultra-high efficiency 2835 SMD LEDs placed on an extra thick 3oz PCB board for a durable finish, complete with (3M 300LSE) self-adhesive for easy mounting.

10W | NANO LED STRIP| 240 LEDs Per Metre



Colour Temperature	Lm Per M	IP Rating
2200K	890lm	IP20
2700K	940lm	IP20
3000K	1020lm	IP20
4000K	1100lm	IP20

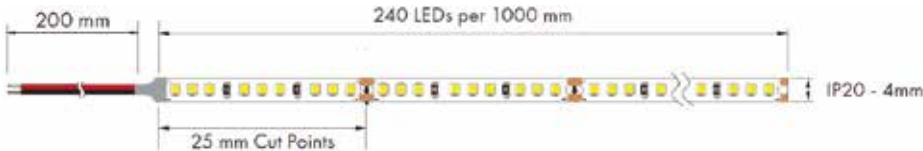


- Dimmable
- IP20
- LM80
- 3 Step MacAdam
- CRI 82+
- Single Binning
- DC 24V
- 5 Year

Our NANO LED Strips are designed to be concealed and light up even the tightest of spaces. This 10W per metre model features a width of only 4mm whilst equipped with high efficiency 1808 SMD LEDs on a 2oz PCB board for a durable finish, complete with (3M 300LSE) self-adhesive for easy mounting.

18W | DIM TO WARM STRIP| 224 LEDs Per Metre



Colour Temperature	Lm Per M	IP Rating
1800K-3000K	1460lm	IP20
1800K-3000K	1460lm	IP65

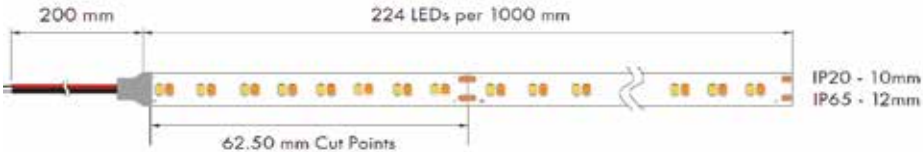

- Dimmable
- IP20
- IP65
- LM80
- 3 Step MacAdam
- CRI 95+
- Single Binning
- DC 24V
- 5 Year

Our DIM to WARM Series Strip is designed to create a dynamic cosy light aesthetic, the more it is dimmed the warmer it becomes to recreate that old halogen colour effect. This 18W per metre model features high efficiency 2216 SMD LEDs on a 2oz PCB board for a durable finish, complete with (3M 300LSE) self-adhesive for easy mounting.




RGB, RGBW & Tunable LED Strip

8W | RGB NANO LED STRIP| 120 LEDs Per Metre



Colour Temperature	Lm Per M	IP Rating
RGB	293lm	IP20

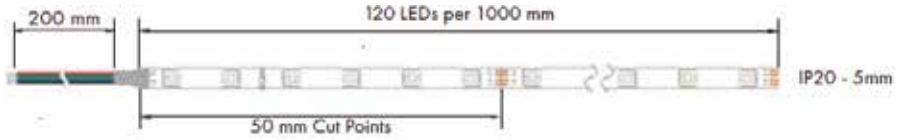

Dimmable

IP20

LM80

Single Binning

DC 24V


5 Year

Our NANO RGB Strips are designed to be concealed and light up even the tightest of spaces. This 8W per metre model features a width of only 5mm whilst equipped with high efficiency (3 in 1) SMD LEDs on a 2oz PCB board for a durable finish, complete with (3M 300LSE) self-adhesive for easy mounting.

12W | RGB LED STRIP| 120 LEDs Per Metre



Colour Temperature	Lm Per M	IP Rating
RGB	480lm	IP20
RGB	480lm	IP65

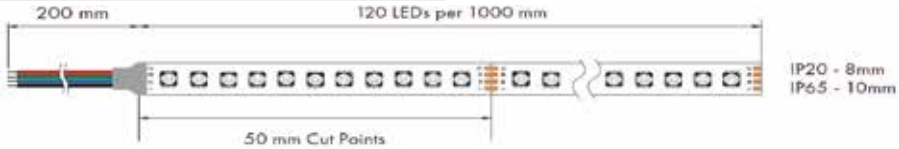

Dimmable

IP20

IP65

LM80

Single Binning

DC 24V


5 Year

Our RGB SERIES 12W per metre LED Strip features branded high efficiency (3 in1) SMD LEDs on a 2oz PCB board for a durable finish, complete with (3M 300LSE) self-adhesive for easy mounting.

24W | RGB LED STRIP| 240 LEDs Per Metre



Colour Temperature	Lm Per M	IP Rating
RGB	960lm	IP20
RGB	960lm	IP65

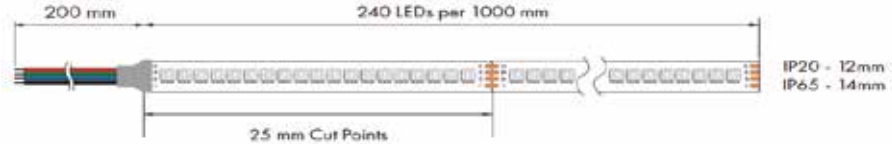


- Dimmable
- IP20
- IP65
- LM80
- Single Binning
- DC 24V
- 5 Year

Our HIGH OUTPUT RGB strips produce a seamless LINEAR light finish when combined with any aluminium extrusion. This 24W per metre model features branded high efficiency (3 in 1) SMD LEDs on a 2oz PCB board for a durable finish, complete with (3M 300LSE) self-adhesive for easy mounting.

20W | RGBW LED STRIP| 60 LEDs Per Metre



Colour Temperature	Lm Per M RGB/W	IP Rating
RGB+W (3K)	730lm / 380lm	IP20
RGB+W (4K)	730lm / 420lm	IP65
RGB+W (3K)	730lm / 380lm	IP20
RGB+W (4K)	730lm / 420lm	IP65

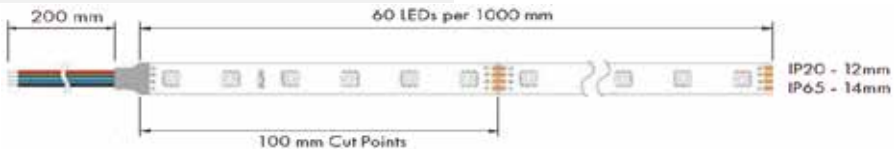


- Dimmable
- IP20
- IP65
- LM80
- Single Binning
- DC 24V
- 5 Year

Our RGBW 20W per metre LED Strip features branded high efficiency (4 in 1) SMD LEDs on a 2oz PCB board for a durable finish, complete with (3M 300LSE) self-adhesive for easy mounting.

30W | RGBW LED STRIP| 96 LEDs Per Metre



Colour Temperature	Lm Per M RGB/W	IP Rating
RGB+W (3K)	1335lm / 680lm	IP20
RGB+W (4K)	1335lm / 700lm	IP65
RGB+W (3K)	1335lm / 680lm	IP20
RGB+W (4K)	1335lm / 700lm	IP65

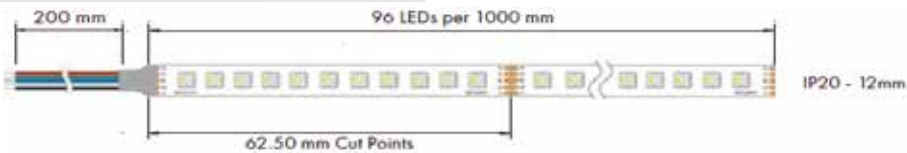


- Dimmable
- IP20
- IP65
- LM80
- Single Binning
- DC 24V
- 5 Year

Our RGBW 30W per metre LED Strip features branded high efficiency (4 in 1) SMD LEDs on a 3oz PCB board for a durable finish, complete with (3M 300LSE) self-adhesive for easy mounting.

10W | TUNEABLE LED STRIP| 120 LEDs Per Metre



Colour Temperature	Lm Per M	IP Rating
2700K-6500K	475lm - 940lm	IP20
2700K-6500K	475lm - 940lm	IP65

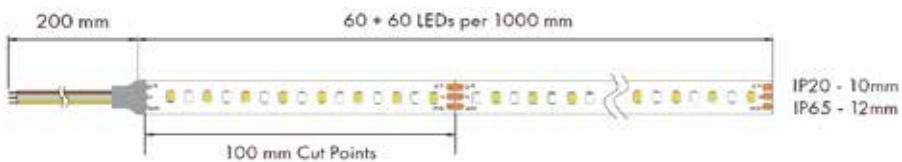


- Dimmable
- IP20
- IP65
- LM80
- 3 Step MacAdam
- CRI 95+
- Single Binning
- DC 24V
- 5 Year

Our TUNEABLE WHITE 10W per metre LED Strip features branded high efficiency 2835 SMD LEDs on a 2oz PCB board for a durable finish, complete with (3M 300LSE) self-adhesive for easy mounting.

20W | TUNEABLE LED STRIP| 240 LEDs Per Metre



Colour Temperature	Lm Per M	IP Rating
2700K-6500K	850lm - 1700lm	IP20
2700K-6500K	850lm - 1700lm	IP65

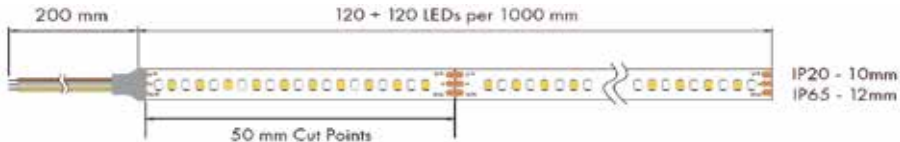


- Dimmable
- IP20
- IP65
- LM80
- 3 Step MacAdam
- CRI 95+
- Single Binning
- DC 24V
- 5 Year

Our TUNEABLE WHITE strips produce a seamless linear light finish when combined with any aluminium extrusion, this 20W per metre model features branded high efficiency 1808 SMD LEDs on a 2oz PCB board for a durable finish, complete with (3M 300LSE) self-adhesive for easy mounting.


Flexible LED



10W | TOP VIEW FLEX | Single Colour

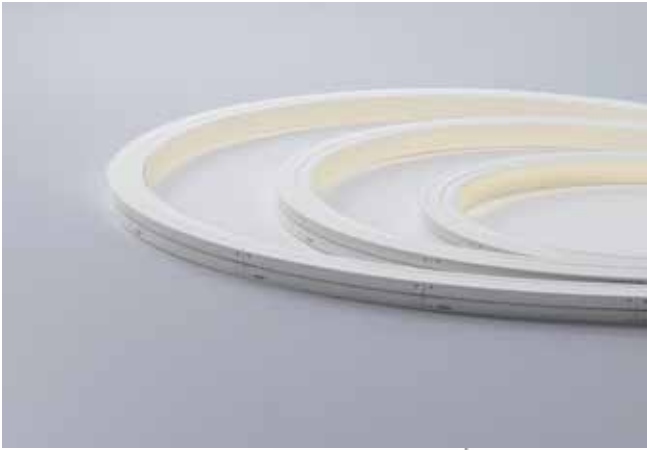

Colour Temperature	Lm Per M	IP Rating
2700K	650lm	IP67
3000K	660lm	IP67
4000K	680lm	IP67




- Dimmable
-
- IP67
- LM80
- 3 Step MacAdam
- CRI 92+
- Single Binning
- DC 24V
- 5 Year

Our TOP VIEW LED FLEX 10w per metre features high efficiency 2835 LEDs on a 2oz PCB board. Housed in a solvent, salt water and UV resistant extruded silicone tube, this product does not require mounting onto a heat sink and offers a LINEAR output in all applications. Top View Flex units can be manipulated vertically up to a 200mm radius with the light source encapsulated along the bottom / top of each run.

15W | TOP VIEW FLEX | Single Colour



Colour Temperature	Lm Per M	IP Rating
2200K	900lm	IP67
2700K	1000lm	IP67
3000K	1100lm	IP67
4000K	1200lm	IP67




- Dimmable
-
- IP67
- LM80
- 3 Step MacAdam
- CRI 92+
- Single Binning
- DC 24V
- 5 Year

Our TOP VIEW FLEX 15w per metre features high efficiency 2835 LEDs on a 3oz PCB board. Housed in a solvent, salt water and UV resistant extruded silicone tube, this product does not require mounting onto a heat sink and offers a LINEAR output in all applications. Top View Flex units can be manipulated vertically up to a 100mm radius with the light source encapsulated along the bottom / top of each run.

10W | TOP VIEW FLEX | RGB




Colour Temperature	Lm Per M	IP Rating
RGB	290lm	IP67

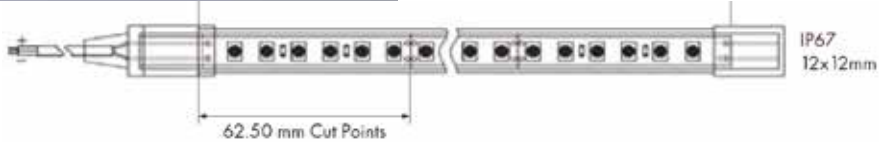


- Dimmable
- Flexible
- IP67
- LM80
- Single Binning
- DC 24V
- 5 Year

Our TOP VIEW RGB FLEX 10w per metre features high efficiency (3 in 1) LEDs on a 2oz PCB board. Housed in a solvent, salt water and UV resistant extruded silicone tube, this product does not require mounting onto a heat sink and offers a LINEAR output in all applications. Top View Flex units can be manipulated vertically up to a 200mm radius with the light source encapsulated along the bottom / top of each run.

15W | TOP VIEW FLEX | RGBW

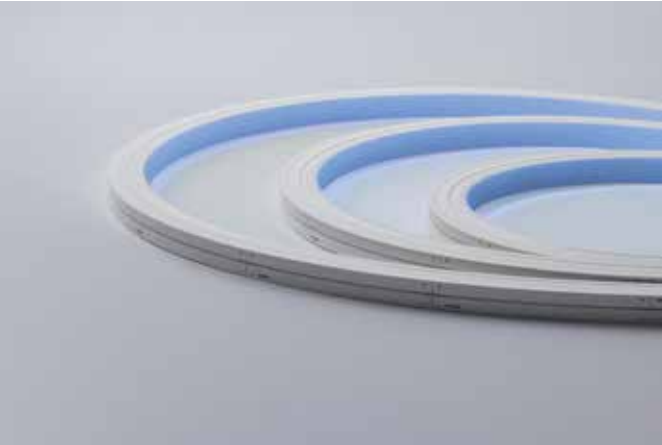

Colour Temperature	Lm Per M RGB/W	IP Rating
RGB+W(3K)	510lm / 210lm	IP67
RGB+W(4K)	510lm / 230lm	IP67

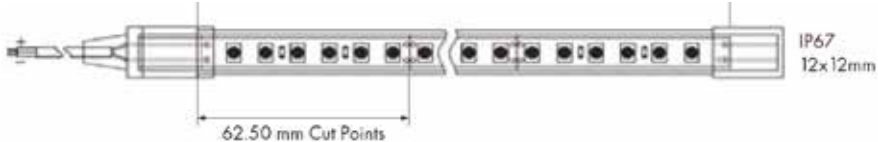


- Dimmable
- Flexible
- IP67
- LM80
- Single Binning
- DC 24V
- 5 Year

Our TOP VIEW RGBW FLEX 15w per metre features high efficiency (4 in 1) LEDs on a 2oz PCB board. Housed in a solvent, salt water and UV resistant extruded silicone tube, this product does not require mounting onto a heat sink and offers a LINEAR output in all applications. Top View Flex units can be manipulated vertically up to a 200mm radius with the light source encapsulated along the bottom / top of each run.

10W | LINEAR NANO SIDE BEND FLEX | Single Colour




Colour Temperature	Lm Per M	IP Rating
2700K	340lm	IP67
3000K	360lm	IP67
4000K	380lm	IP67

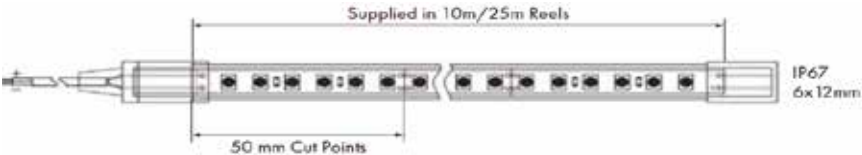


- Dimmable
-
- IP67
- LM80
- 3 Step MacAdam
- CRI 92+
- Single Binning
- DC 24V
- 5 Year

Our LINEAR NANO SIDE BEND 10w per metre features high efficiency 2835 LEDs on a2oz PCB board. Housed in a solvent, salt water and UV resistant extruded silicone tube, this product does not require mounting onto a heat sink and offers a LINEAR output in all applications. Side Bend Nano Flex units can be manipulated horizontally up to a 50mm radius with the light source encapsulated along the bottom / top of each run.

10W | LINEAR SIDE BEND FLEX | Single Colour

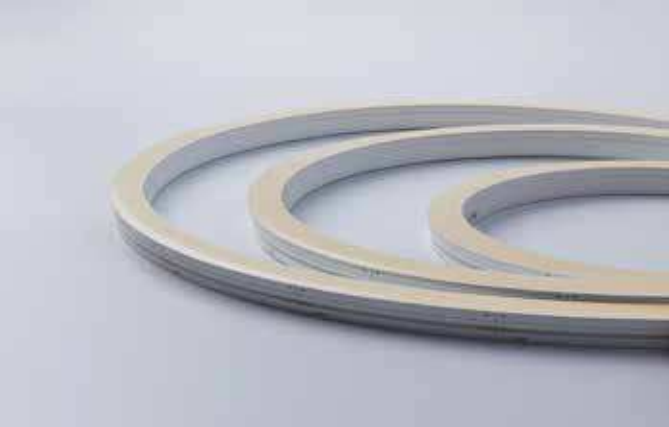

Colour Temperature	Lm Per M	IP Rating
2700K	310lm	IP67
3000K	330lm	IP67
4000K	350lm	IP67

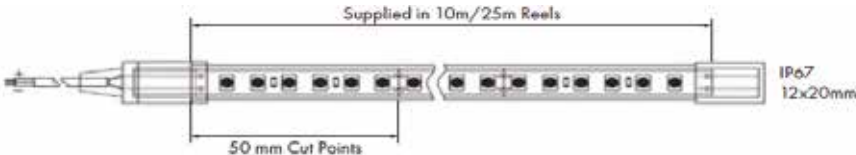


- Dimmable
-
- IP67
- LM80
- 3 Step MacAdam
- CRI 92+
- Single Binning
- DC 24V
- 5 Year

Our LINEAR SIDE BEND 10w per metre features high efficiency 2835 LEDs on a2oz PCB board. Housed in a solvent, salt water and UV resistant extruded silicone tube, this product does not require mounting onto a heat sink and offers a LINEAR output in all applications. Side Bend Nano Flex units can be manipulated horizontally up to a 200mm radius with the light source encapsulated along the bottom / top of each run.

10W | LINEAR NANO SIDE BEND FLEX | RGB




Colour Temperature	Lm Per M	IP Rating
RGB	130lm	IP67

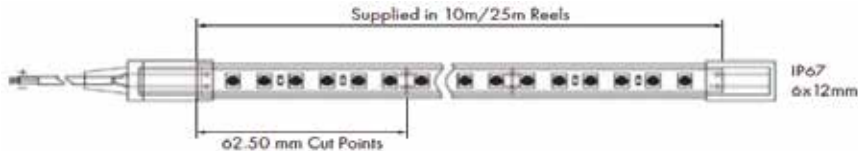


- Dimmable
-
- IP67
- LM80
- Single Binning
- DC 24V
-

Our LINEAR LED FLEX Side Bend Nano 10w per metre RGB features high efficiency (3 in 1) LEDs on a 2oz PCB board. Housed in a solvent, salt water and UV resistant extruded silicone tube, this product does not require mounting onto a heat sink and offers a LINEAR output in all applications. Side Bend Flex units can be manipulated horizontally up to a 50mm radius with the light source encapsulated along the bottom / top of each run.

15W | LINEAR SIDE BEND FLEX | RGBW

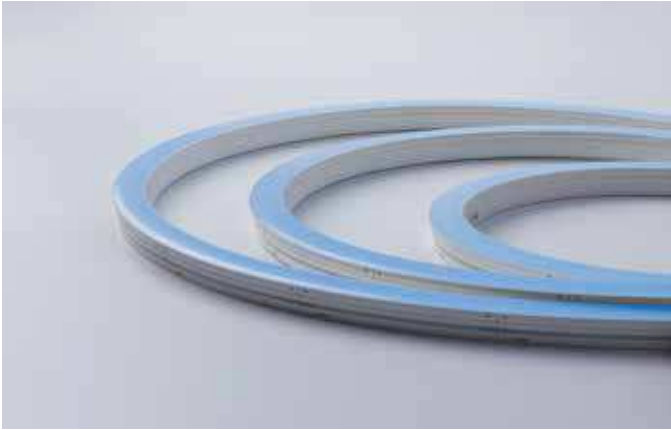

Colour Temperature	Lm Per M RGB/W	IP Rating
RGB+W(3K)	310lm / 125lm	IP67
RGB+W(4K)	310lm / 135lm	IP67

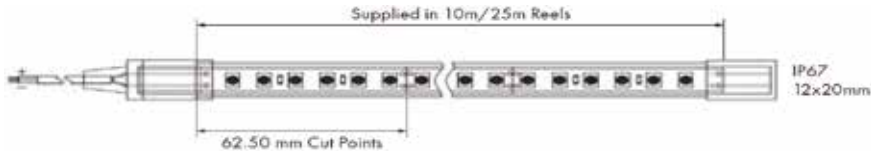

- Dimmable
-
- IP67
- LM80
- Single Binning
- DC 24V
-

Our LINEAR LED FLEX Top View 15w per metre features high efficiency 4 in 1 LEDs on a 2oz PCB board. Housed in a solvent, salt water and UV resistant extruded silicone tube, this product does not require mounting onto a heat sink and offers a LINEAR output in all applications. Side Bend Flex unit can be manipulated horizontally up to a 200mm radius with the light source encapsulated along the bottom / top of each run.

Aluminium Extrusions




All of our Aluminium Extrusions come in a standard length of 1000mm or 2000mm but on request, we can cut to your desired lengths.

We can offer either a clear or opal diffuser and all of our extrusions come complete with a set of end caps and mounting clips where required.

15x2mm Heat Sink




Anodised Aluminium Finish
Compatible with all LED Strips
6063 Extruded High Strength Aluminium
High heat dissipation, 2.5mm thick Extruded Aluminium



17x7mm Surface




Anodised Aluminium Finish 6063 Extruded High Strength Aluminium
Choice of Clear, Opal or Black Polycarbonate Diffusers
Each Metre includes two End Caps & Mounting Accessories
Compatible with all LED Strips apart from RGBW in IP65.
LINEAR finish when combined with 196+ LEDs per metre Strips



17x14mm Surface




Anodised Aluminium Finish 6063 Extruded High Strength Aluminium
Choice of Clear, Opal or Black Polycarbonate Diffusers
Each Metre includes two End Caps & Mounting Accessories
Compatible with all LED Strips apart from RGBW in IP65
LINEAR finish when combined with 120+ LEDs per metre Strips




23x20mm Double Surface Deep




Anodised Aluminium Finish Compatible with all LED Strips
6063 Extruded High Strength Aluminium
Choice of Clear, Opal or Black Polycarbonate Diffusers
Each Metre includes two End Caps & Mounting Accessories
LINEAR finish when combined with all LED Strips



20x20mm Surface Square

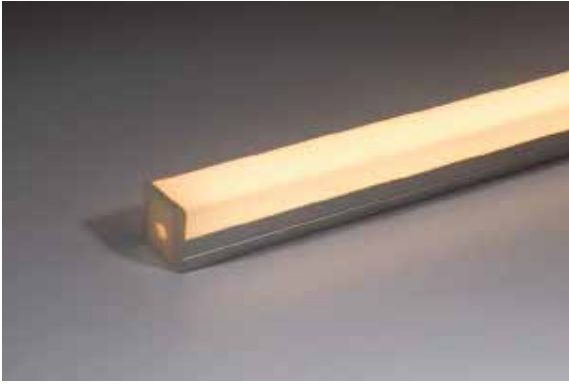

Anodised Aluminium Finish, Compatible with all LED Strips
6063 Extruded High Strength Aluminium
Available with an Opal Polycarbonate Diffuser
Each Metre includes two End Caps & Mounting Accessories
LINEAR finish when combined with LED Strips




IP20

5 Year

20x20mm Surface Circular



Anodised Aluminium Finish, Compatible with all LED Strips
6063 Extruded High Strength Aluminium
Available with an Opal Polycarbonate Diffuser
Each Metre includes two End Caps & Mounting Accessories
LINEAR finish when combined with LED Strips




IP20

5 Year

23x10mm Double Surface Slim



Anodised Aluminium Finish, Compatible with all LED Strips
6063 Extruded High Strength Aluminium
Choice of Clear and Opal Polycarbonate Diffusers
Each Metre includes two End Caps & Mounting Accessories
LINEAR finish when combined with LED Strips




IP20

5 Year

35x35mm Surface



Anodised Aluminium Finish, Compatible with all LED Strips
6063 Extruded High Strength Aluminium
Available with an Opal Polycarbonate Diffuser
Each Metre includes two End Caps & Mounting Accessories
LINEAR finish when combined with LED Strips




IP20

5 Year

18x18mm Angled Alu



Anodised Aluminium Finish 6063 Extruded High Strength Aluminium
Choice of Clear, Opal or Black Polycarbonate Diffusers Each Metre includes 2 end caps and Mounting Accessories, Compatible with all LED Strips apart from RGBW in IP65.




IP20

5
Year

30x30mm Angled Alu



Anodised Aluminium Finish Compatible with all LED Strips 6063 Extruded High Strength Aluminium. Available with an Opal Polycarbonate Diffuser Each Metre includes two End Caps & Mounting Accessories LINEAR finish when combined with 60+ LEDs per metre Strips




IP20

5
Year

8x9mm Nano Surface Alu



Anodised Aluminium Finish 6063 Extruded High Strength Aluminium Compatible with all Nano LED Strips. Available with an Opal Polycarbonate Diffuser, Each Metre includes two End Caps & Mounting Accessories LINEAR finish when combined with 120+ LEDs per metre Strips




IP20

5
Year

8x8mm Nano Angled SQ



Anodised Aluminium Finish 6063 Extruded High Strength Aluminium Compatible with all Nano LED Strips. Available with an Opal Polycarbonate Diffuser. Each Metre includes two End Caps & Mounting Accessories LINEAR finish when combined with 240+ LEDs per metre Strips




IP20

5
Year

8x8mm Nano Angled Alu



Anodised Aluminium Finish 6063 Extruded High Strength Aluminium
Compatible with all Nano LED Strips, Available with an Opal Polycarbonate Diffuser. Each Metre includes two End Caps & Mounting Accessories
LINEAR finish when combined with 240+ LEDs per metre Strips.



11x9mm Nano Recessed Alu




Anodised Aluminium Finish 6063 Extruded High Strength Aluminium
Compatible with all Nano LED Strips, Each Metre includes End Cap Accessories. Available with an Opal Polycarbonate Diffuser
LINEAR finish when combined with 240+ LEDs per metre Strips



25x7mm Recessed Alu




Anodised Aluminium Finish 6063 Extruded High Strength Aluminium
Each Metre includes End Cap Accessories. Choice of Clear, Opal or Black Polycarbonate Diffusers. Compatible with all LED Strips apart from RGBW
in IP65 LINEAR finish when combined with 196+ LEDs per metre Strips



25x14mm Deep Recessed Alu




Anodised Aluminium Finish 6063 Extruded High Strength Aluminium
Each Metre includes End Cap Accessories. Choice of Clear, Opal or Black Polycarbonate Diffusers . Compatible with all LED Strips apart from RGBW
in IP65 LINEAR finish when combined with 120+ LEDs per metre Strips



30x20mm Deep Recessed Alu



Anodised Aluminium Finish Compatible with all LED Strips 6063 Extruded High Strength Aluminium. Each Metre includes End Cap Accessories Choice of Clear and Opal Polycarbonate Diffusers LINEAR finish when combined with 60+ LEDs per metre Strips




IP20

5 Year

27x11mm Shallow Walkover Alu



Anodised Aluminium Finish 6063 Extruded High Strength Aluminium Each Metre includes end cap Accessories. Available with an Opal Polycarbonate Diffuser. Compatible with all LED Strips apart from RGBW in IP65. LINEAR finish when combined with 196+ LEDs per metre Strips




IP20

5 Year

31x10mm Recessed Double Alu



Anodised Aluminium Finish Compatible with all LED Strips 6063 Extruded High Strength Aluminium. Each Metre includes End Cap Accessories Choice of Clear and Opal Polycarbonate Diffusers. LINEAR finish when combined with 196+ LED's per metre Strips



IP20

5 Year

22x26mm Deep Walkover Alu



Anodised Aluminium Finish 6063 Extruded High Strength Aluminium Each Metre includes end cap Accessories. Available with an Opal Polycarbonate Diffuser. Compatible with all LED Strips apart from RGBW in IP65. LINEAR finish when combined with 120+ LEDs per metre Strips




IP20

5 Year

52x13mm Plaster In Narrow Alu




Anodised Aluminium Finish 6063 Extruded High Strength Aluminium
Each Metre includes End Cap Accessories Available with an Opal Polycarbonate Diffuser Compatible with all LED Single Colour Strips in IP20 LINEAR finish when combined with 120+ LEDs per metre Strips

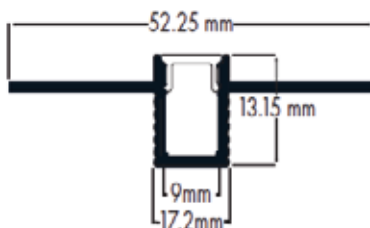


IP20

5 Year

57x14mm Plaster In Deep Alu

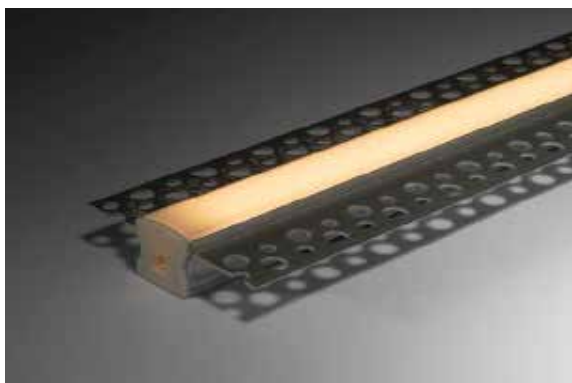

Anodised Aluminium Finish 6063 Extruded High Strength Aluminium
Each Metre includes End Cap Accessories Choice of Clear, Opal or Black Polycarbonate Diffusers Compatible with all LED Strips apart from RGBW in IP65. LINEAR finish when combined with 120+ LEDs per metre Strips

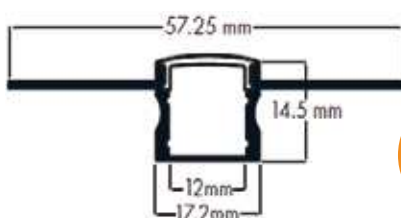


IP20

5 Year

63x20mm Plaster In Deep Double Alu



Anodised Aluminium Finish Compatible with all LED Strips 6063 Extruded High Strength Aluminium Each Metre includes End Cap Accessories Choice of Clear and Opal Polycarbonate Diffusers LINEAR finish when combined with 60+ LEDs per metre Strips

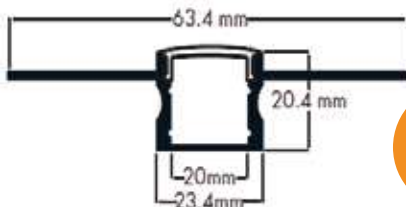


IP20

5 Year

60x14mm Plaster In Double Alu



Anodised Aluminium Finish Compatible with all LED Strips 6063 Extruded High Strength Aluminium Each Metre includes End Cap Accessories Choice of Clear and Opal Polycarbonate Diffusers LINEAR finish when combined with 120+ LEDs per metre Strips

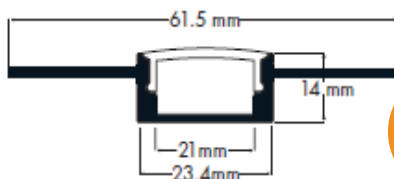



IP20

5 Year

75x35mm Plaster In Linear Alu




Anodised Aluminium Finish Compatible with all LED Strips 6063 Extruded High Strength Aluminium Each Metre includes End Cap Accessories Available with an Opal Polycarbonate Diffuser LINEAR finish when combined with 60+ LEDs per metre Strips

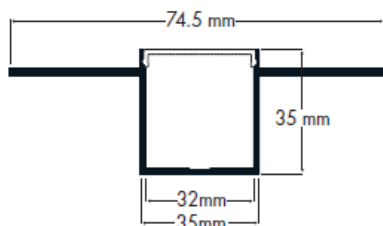


32x13mm Plaster In Edge Alu



Anodised Aluminium Finish 6063 Extruded High Strength Aluminium Each Metre includes End Cap Accessories Available with an Opal Polycarbonate Diffuser Compatible with all LED Single Colour ECO Strips in IP20 LINEAR finish when combined with 120+ LEDs per metre Strips



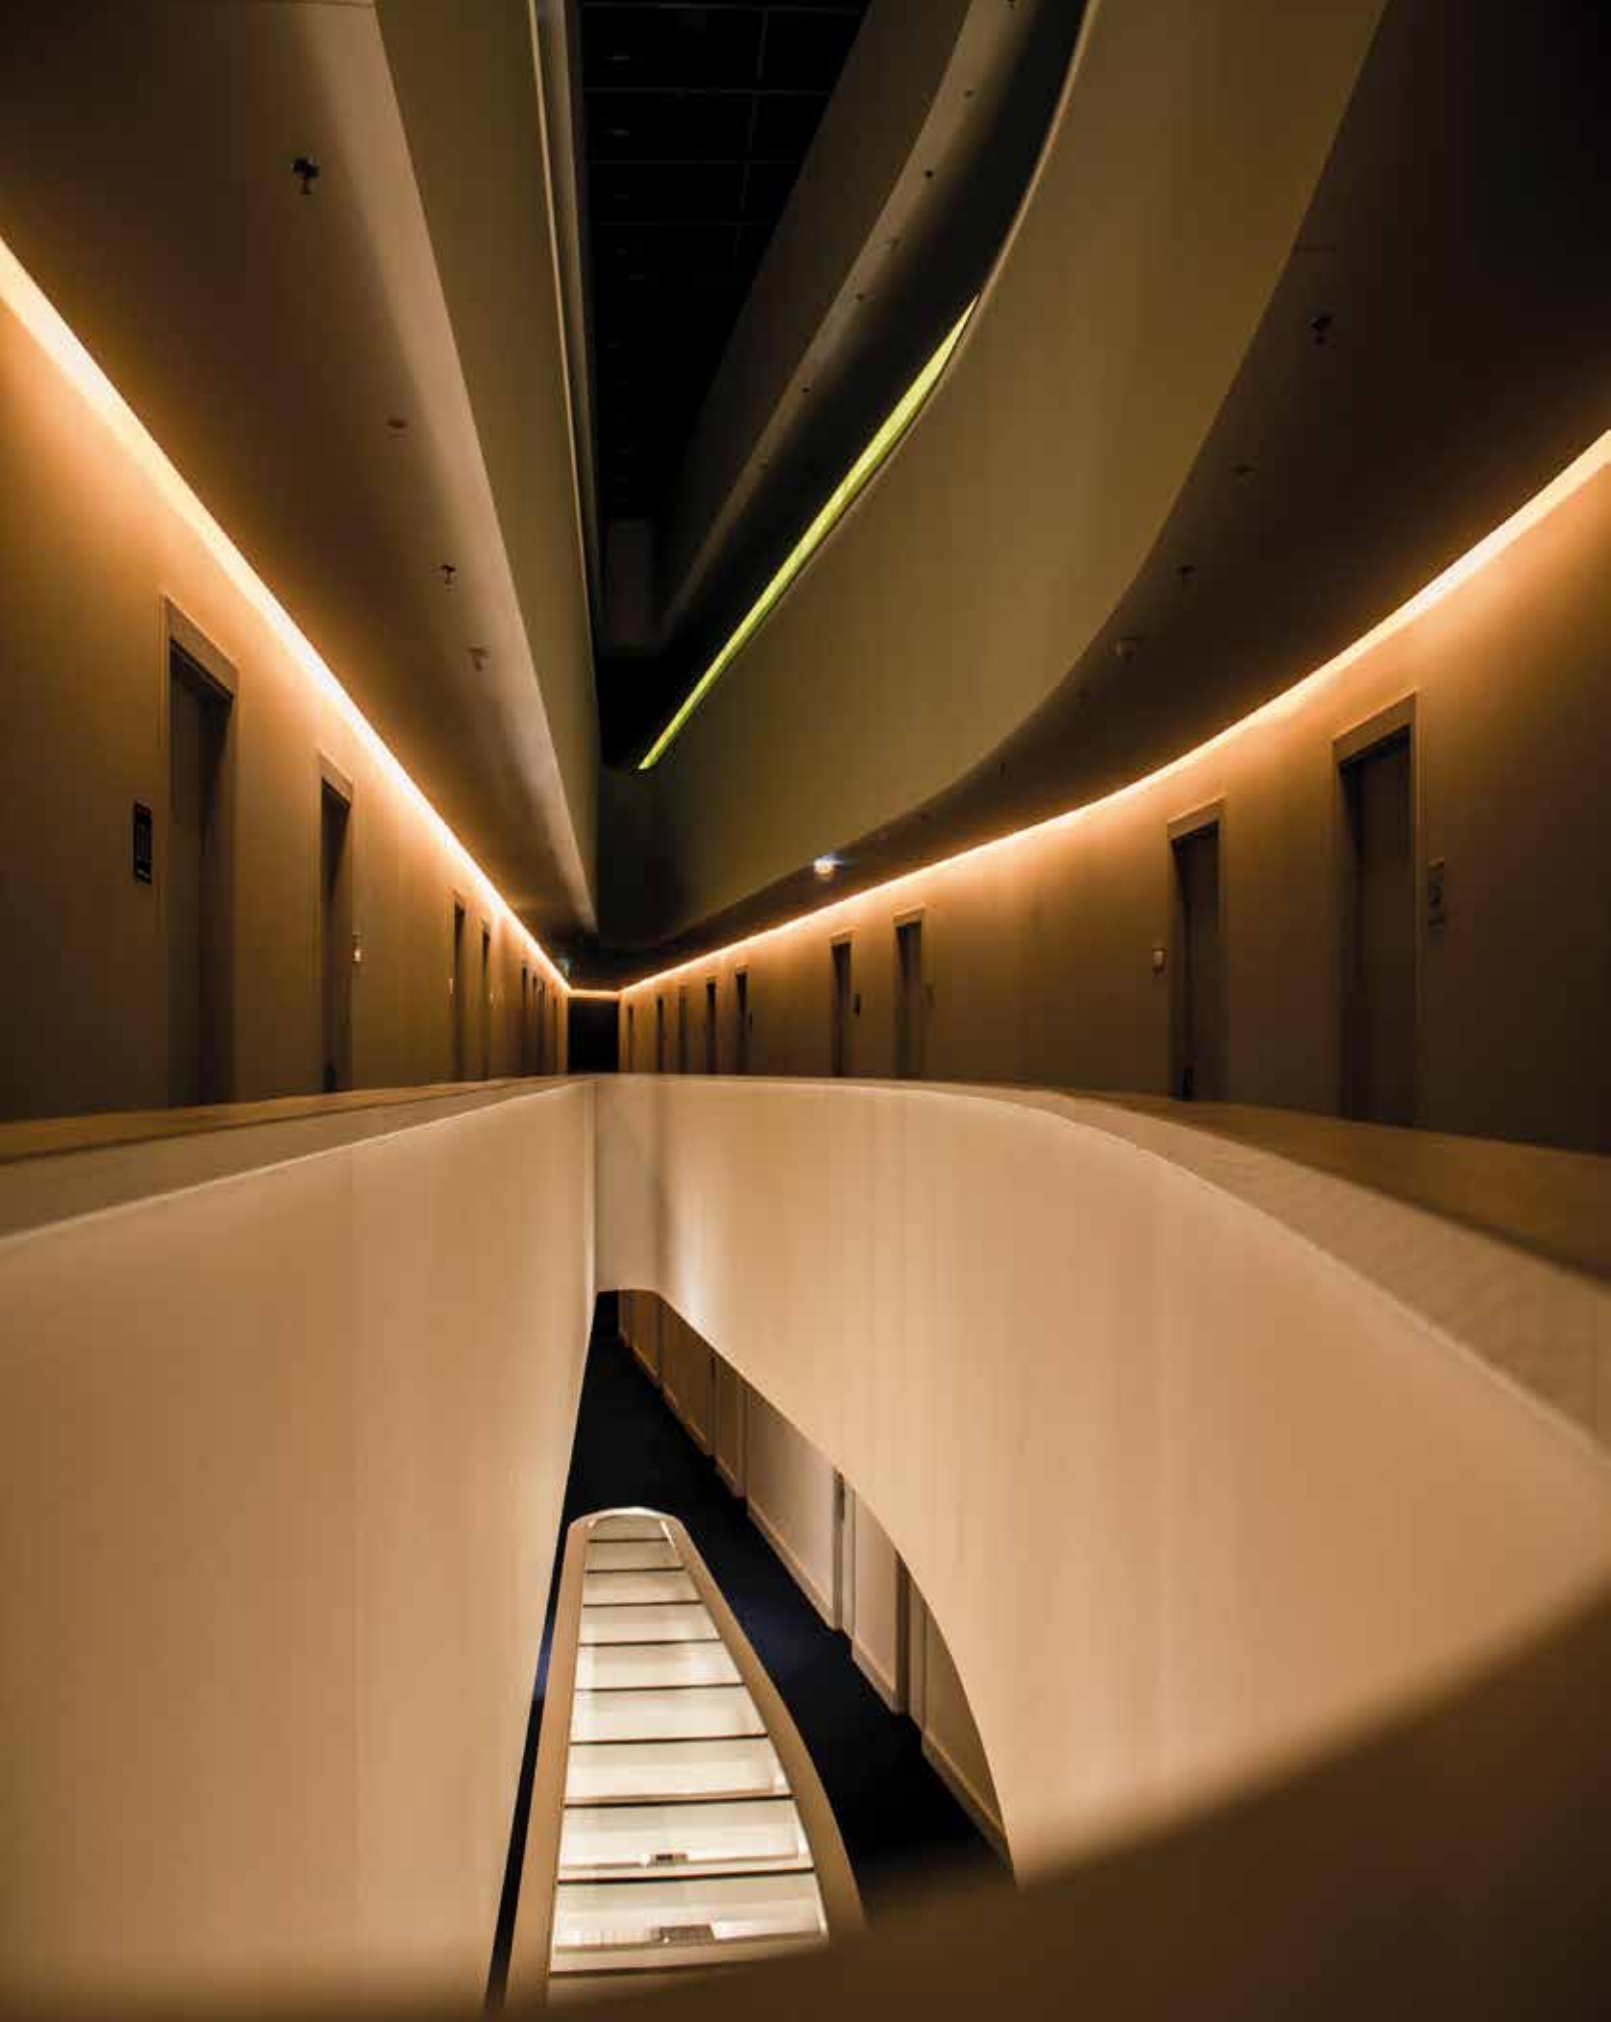

We excel at:

- Communication.
- Rapid response.
- Meeting your deadlines.
- After sales service.

We specialise in:

- Modernising existing fittings.
- Building unique luminaires.
- Undertaking all types of refurbishments.

DRK **LIGHTING**